



FIXTURE TYPE: ____

PROJECT NAME: __



GENERAL INFORMATION:

The Astryx Bollard from Bullard Outdoor is a robust LED bollard light featuring a square, upward-facing light design. With a power output of 10W and an input voltage range of 110-277V, it is crafted from pure aluminum and gasket materials, providing high corrosion and compression resistance with an IP65 protection rating. Ideal for outdoor settings such as gardens, parks, paths, and villas, this bollard is simple to install and energy-efficient. Measuring H: 21.65" (55 cm), L: 7.87" (20 cm), and W: 4.72" (12 cm), it offers CCT options of 2700K, 3000K, 4000K, and 5000K, a 120° beam angle, and a CRI of 80 or 90.

FIXTURE TYPE:	
Bollard	
LIGHTING	
LED	LED
VOLTAGE:	
110-277V	110· 277V
MATERIAL:	
Aluminum	
IP:	
IP 65	IP65
BEAM ANGLE:	

BUILT FOR THE STORM


120°

sales@gordonbullard.com www.bullardoutdoor.com 1-877-964-4646



991 South Gull Lake Dr Richland, MI 49083 USA

FIXTURE TYPE: ____ PROJECT NAME: _

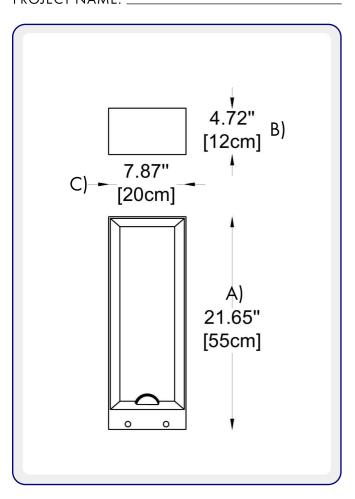

HOW TO ORDER: CODE:

Example:

CODE: BO-0801-BL-K30-C80-DIM-CUS

BO-0801-BL-K30-C80-DIM-CUS

DIMENSIONS:

A) Height -H: 21.65" (55 cm) B) Length -L: 7.87" (20 cm)

C) Width -W: 4.72" (12 cm)

2 LIGHT SOURCE:

LED / 10W / 85 lm/W

3 **SPECIFY CCT:**

> -K27 2700K -K30 3000K -K40 4000K -K50

CRI: 4

-C90

-C80 **CRI 80**

5 **DIMMING OPTIONS:**

> -NON Non-Dimmable

5000K

CRI 90

-DIM 1-10V DMX512 -DMX -RDM **RDM**

FINISH OPTIONS: 6

> -WH White -BL Black

-CUS Custom on request*

BUILT FOR THE STORM

sales@gordonbullard.com www.bullardoutdoor.com 1-877-964-4646



991 South Gull Lake Dr Richland, MI 49083 USA