



FIXTURE TYPE: _____

PROJECT NAME: _____



GENERAL INFORMATION:

The Auro Bollard from Bullard Outdoor is available in two models—single head and twin head—offering a versatile LED lighting solution with customizable heights from 250-750mm. With power ratings of 9W and 2x9W, this bollard operates at 110-277V, using durable aluminum and gasket materials to ensure IP65-rated protection against corrosion. Ideal for gardens, parks, pathways, and villas, it provides beam angles of 24°, 36°, or 45°, color temperatures from 3000K to 6000K, and CRI options of 80 or 90. Simple to install, the Auro Bollard combines efficient performance with low energy consumption.

FIXTURE TYPE:

Bollard

LIGHTING

LED

LED

VOLTAGE:

110-277V

110-277V

MATERIAL:

Aluminum

PAINTING:

Black, White, Custom on request*

IP:

IP 65

IP65

LED

110-277V

IP65



BUILT FOR THE STORM

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

FIXTURE TYPE: _____

PROJECT NAME: _____

HOW TO ORDER:

CODE:

Example:

CODE: BO-15-BL-1-H29-W9-B24-K30-C80-WH-DIM

BO-15-BL-1-H29-
W9-B24-K30-C80-
WH-DIM

1

MODEL:

-1 (single head)

DIMENSIONS:

A) Head Diameter - Ø: 2.36" (6 cm)

B) Head Height - H: 4.7" (12 cm)

-2 (twin head)

DIMENSIONS:

A) Head Diameter - Ø: 2.36" (6 cm)

B) Head Height - H: 4.7" (12 cm)

C) Length - L: 7.5" (19 cm)

2

HEIGHT:

-H29 H: 29.5" (75 cm)

-H39 H: 39.37" (100 cm)

-H59 H: 59" (150 cm)

3

LIGHT SOURCE:

-W9 LED / 9W / 585 lm for single head*

-W18 LED / 2 x 9W / 1080 lm for twin head*

4

BEAM ANGLE:

-B24 24°

-B36 36°

-B45 45°

5


SPECIFY CCT:

-K30 3000K

-K40 4000K

-K50 5000K

-K60 6000K

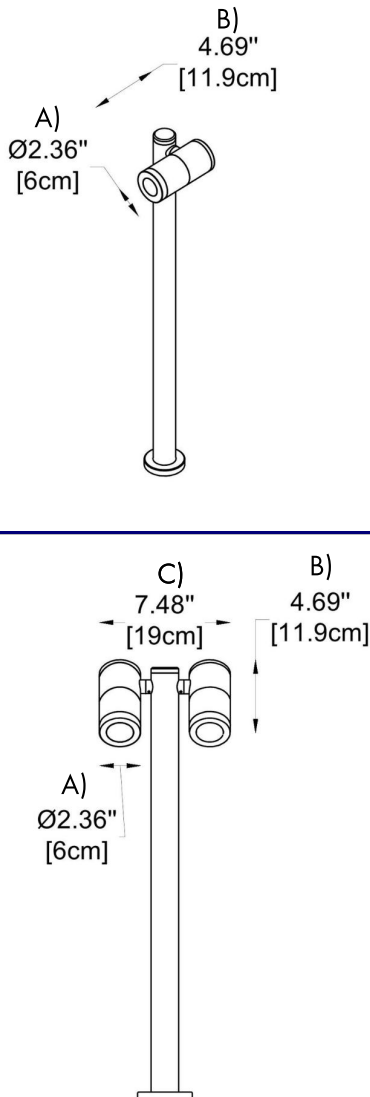

LED

110-
277V

IP65



BUILT FOR THE STORM

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

FIXTURE TYPE: _____

PROJECT NAME: _____

HOW TO ORDER:

CODE:

Example:
CODE: BO-15-BL-1-H29-W9-B24-K30-C80-WH-DIM

BO-15-BL-1-H29-
W9-B24-K30-C80-
WH-DIM

5

CRI:

-C80

CRI 80

-C90

CRI 90

6

FINISH OPTIONS:

-WH

White

-BL

Black

-CUS

Custom on request*

7



DIMMING OPTIONS:

-NON

NON-Dimmable

-DIM

1-10V

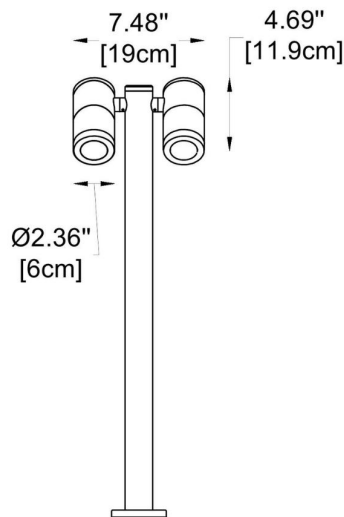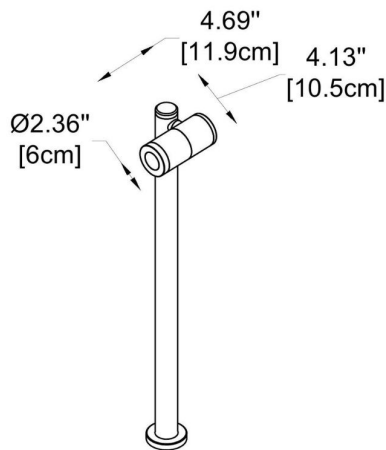

LED

**110-
277V**

IP65



BUILT FOR THE STORM

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr


Richland, MI 49083

USA


FIXTURE TYPE: _____

PROJECT NAME: _____


INSTALLATION INSTRUCTION:




Drill the hole and install the expansion bolts.



Connect to power supply with a waterproof (IP68) connector.



Install the lamps.



Pull down the cover onto the mounting base.

BUILT FOR THE STORM

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA