







FIXTURE TYPE:	
PROJECT NAME: _	



## **GENERAL INFORMATION:**

The Teros Bollard from Bullard Outdoor is a compact LED bollard light with a modern square design, standing at 7.36" (18.7 cm) in height. Designed for durability and ease of installation, it is crafted from pure aluminum with gasket materials, offering a high IP65 protection class to withstand corrosion and compression. Ideal for gardens, parks, pathways, and villa landscapes, the Teros Bollard is energy-efficient with a 10W LED light source and 85 lm/W efficiency. It measures H: 7.36" (18.7 cm) and Ø: 31.5" (80 cm) and is available in CCT options of 2700K, 3000K, 4000K, and 5000K, with a wide 120° beam angle and CRI of 80 or 90.

FIXTURE TYPE:	
Bollard	
LIGHTING	
LED	LED
VOLTAGE:	
110-277V	110. 277V
MATERIAL:	
Aluminum + PC	
IP:	
IP 65	IP65
BEAM ANGLE:	










## **BUILT FOR THE STORM**

120°

sales@gordonbullard.com www.bullardoutdoor.com 1-877-964-4646



991 South Gull Lake Dr Richland, MI 49083 USA PROJECT NAME:

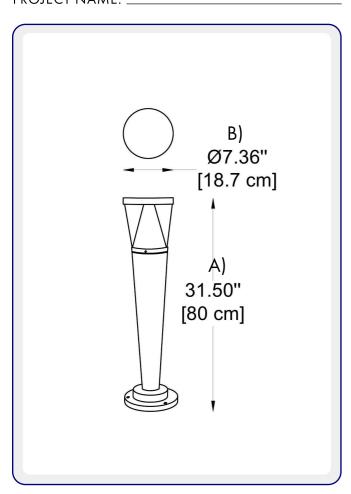

HOW TO ORDER: CODE:

Example:

CODE: BO-1001-BL-K30-C80-DIM-CUS

BO-1001-BL-K30-C80-DIM-CUS

1 DIMENSIONS:

A) Height - A) H: 7.36" (18.7 cm)
B) Diameter - B) Ø: 31.5" (80 cm)

2 LIGHT SOURCE:

LED / 10W / 85 lm/W

3 | SPECIFY CCT:

-K27 2700K -K30 3000K -K40 4000K

-K50 5000K

4 | CRI:

-C80 CRI 80 -C90 CRI 90

5 DIMMING OPTIONS:

-NON Non-Dimmable

-DIM 1-10V -DMX DMX512 -RDM RDM

6 | FINISH OPTIONS:

-WH White -BL Black

-CUS Custom on request\*

## **BUILT FOR THE STORM**

sales@gordonbullard.com www.bullardoutdoor.com 1-877-964-4646



991 South Gull Lake Dr Richland, MI 49083 USA