



FIXTURE TYPE: _____

PROJECT NAME: _____



LED



IP65



GENERAL INFORMATION:

The TRONIX Bollard from Bullard Outdoor features a square design and stands 20" (50 cm) high, delivering a 5W LED light source with a 110-277V input. Constructed from durable resin and stainless steel, it boasts an IP65 protection class, ensuring resistance to corrosion and compression, making it suitable for various outdoor settings such as gardens, parks, paths, and villas. Easy to install and designed for low energy consumption, the TRONIX Bollard offers versatile lighting options with beam angles of 25°, 40°, or 120°. It supports color temperature choices of 2700K, 3000K, 4000K, and 5000K, along with CRI options of 80 or 90 for enhanced illumination quality.

FIXTURE TYPE:

Bollard

LIGHTING

LED

LED

VOLTAGE:

110-277V



MATERIAL:

Resin + Stainless steel

IP:

IP 65

IP65

BEAM ANGLE:

40°

BUILT FOR THE STORM

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646




991 South Gull Lake Dr

Richland, MI 49083

USA

FIXTURE TYPE: _____

PROJECT NAME: _____

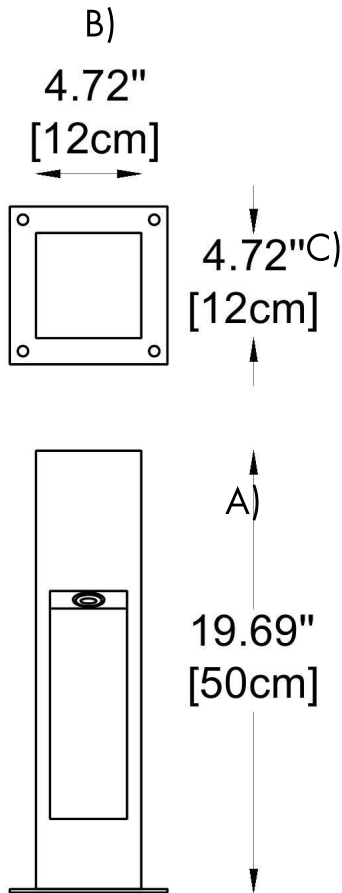

LED



IP65



HOW TO ORDER:

CODE:

Example:
CODE: BO-0101-BL-K30-B25-C80-DIM-CUS

BO-0101-BL-K30-B25-
C80-DIM-CUS

1

DIMENSIONS:

A) Height - H: 20" (50 cm)
B) Length - L: 4.72" (12 cm)
C) Width - W: 4.72" (12 cm)

2

LIGHT SOURCE:

LED / 5W / 85 lm/W

3

SPECIFY CCT:

-K27 2700K
-K30 3000K
-K40 4000K
-K50 5000K

3

BEAM ANGLE:

-B25 25°
-B40 40°
-B120 120°

4

CRI:

-C80 CRI 80
-C90 CRI 90

5

DIMMING OPTIONS:

-NON Non-Dimmable
-DIM 1-10V
-DMX DMX512
-RDM RDM

6

FINISH OPTIONS:

-WH White
-BL Black
-CUS Custom on request*

BUILT FOR THE STORM

sales@gordonbullard.com
www.bullardoutdoor.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA