



CODE: BO-B7EMG0459-WL





SMALL



CODE: BO-B7FMG0958-WL



MEDIUM



CODE:

BO-B7EMG0459-WL

LIGHT SOURCE:

4×3.5W

LENS:

FB11B4

SELECTED DEGREE:

30°

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

73 mA

CONSUMPTION:

17W

LUMINANCE:

1206 lm

IK:

06

CODE:

BO-B7FMG0958-WL

LIGHT SOURCE:

9×3W

LENS:

FB12B5

SELECTED DEGREE:

9°

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

113 mA

CONSUMPTION:

30W

LUMINANCE:

2632 lm

IK:

06



sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

LIGHTING INFORMATION

HOUSING	12# Die-casting aluminum finishing or powder painting T=60-80μm. Adhesion of ISO class 1 / ASTM class 4B
LIGHT WINDOW	Tempered Glass. T=3mm
CABLE GLAND	IP68 PG-9 PA66
GASKET	Tooling shaped seal
LED	SMD 3535
LED DRIVER	Constant Voltage Input, Constant Current Output
CCT	3000K / 3500K / 4000K / 5000K / Custom on request
CRI	90
POWER CABLE	Outside of luminaire 110-277V: H05RN-F 3×1.0mm², L=0.3m
DIMMING SUPPORT	Triac PWM Available, 1-10V, Dali, Customized

REGULAR PAINTING COLOR

Basic	Secondary
 Dark Grey KAP 7037	 Silver Grey KAP 9022
	 Sanded Black RAL 9005

OPTICS

Referenced Degree(°)θ1/2

		9°	15°	20°	30°	45°	60°
	FB11B4						
	FB12B5						

ACCESSOIRES

ANTI-GLARE LOUVER


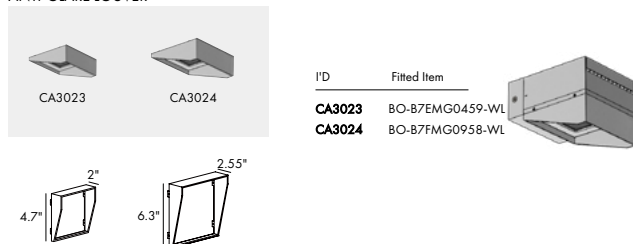


DIAGRAM OF INSTRUCTION

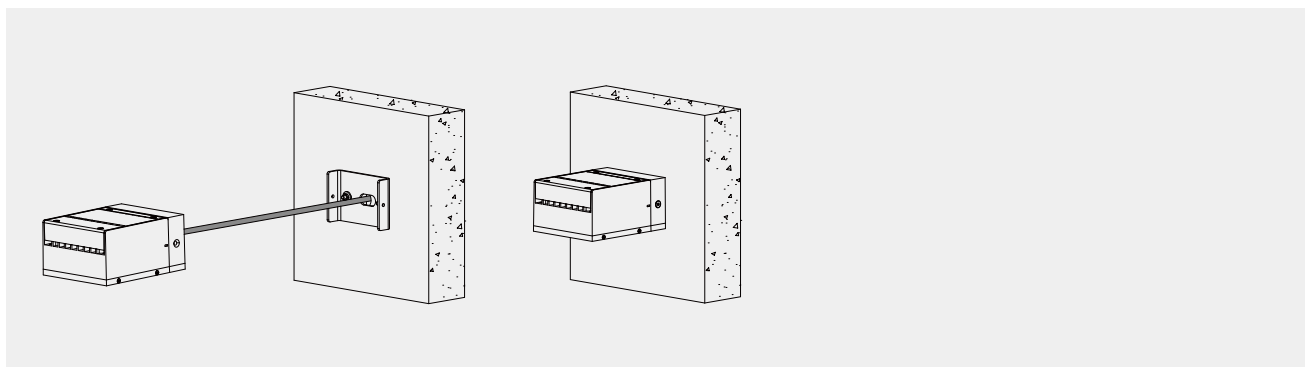

sales@gordonbullarda.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all sheet sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

BEAM DEMO






BO-B7EMG0459-WL






BO-B7FMG0958-WL

PHOTOMETRIC

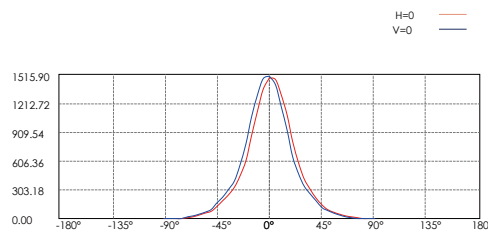

Lux distance Curve

Illuminance at a Distance	
Center Beam LUX	Beam Width V H
2m 369.27 LUX	1.4m 1.4m
4m 92.32 LUX	2.8m 2.8m
6m 41.03 LUX	4.2m 4.3m
8m 23.08 LUX	5.6m 5.7m
10m 14.77 LUX	7.0m 7.1m
12m 10.26 LUX	8.4m 8.5m
Vert.Spread:38.6 Horiz.Spread:39.0	

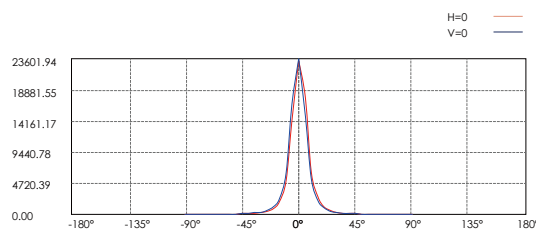

Lux distance Curve

Illuminance at a Distance	
Center Beam LUX	Beam Width V H
2m 5827.80 LUX	0.5m 0.5m
4m 1456.95 LUX	1.0m 1.0m
6m 647.53 LUX	1.5m 1.5m
8m 364.24 LUX	2.0m 2.0m
10m 233.11 LUX	2.4m 2.4m
12m 161.88 LUX	2.9m 2.9m
Vert.Spread:14.0 Horiz.Spread:14.0	



sales@gordonbullarda.com
www.bullardoutdoor.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA

ACANTHITE COLLECTION

CODE: BO-B7EMG0459-WL



CODE: BO-B7FMG0958-WL



HOW TO ORDER:

CODE:

EXAMPLE:

BO-B7EMG0459-WL-BKAP7037-K30-CA3023-DALI

BO-B7EMG0459-
WL-BKAP7037-K30-
CA3023-DALI

1. CHOOSE FIXTURE MODEL:

BO-B7EMG0459-WL SMALL

BO-B7FMG0958-WL MEDIUM

2. BODY FINISH OPTIONS:

-BKAP 7037  Dark Grey

-RAL 9023  Silver Grey

-RAL 9005  Sanded Black

3. CHOOSE CCT

-K30 3000K

-K35 3500K

-K40 4000K

-K50 5000K

-CUS* Custom on request

4. ACCESSOIRES (OPTIONAL)

(ANTI-GLARE LOUVER)

-CA3023  FOR: BO-B7EMG0459-WL

-CA3024  FOR: BO-B7FMG0958-WL

5. DIMMING OPTION:

-PWM Triac PWM

-DIM 1-10V

-DALI Dali

-CUS* Custom on request

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA