


LUSTER

Linear Wall Washer



FIXTURE TYPE: _____

PROJECT NAME: _____

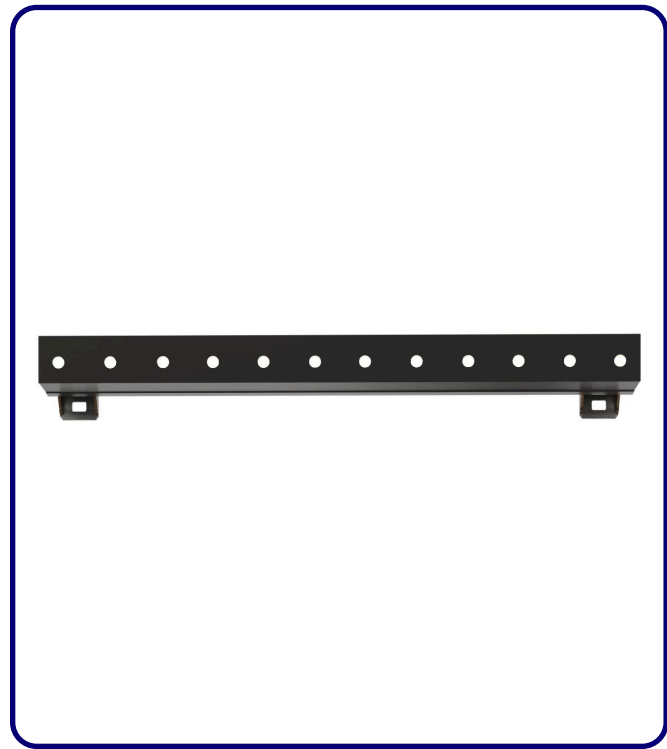

GENERAL INFORMATION:

The LUSTER Linear Wall Washer by Bullard Outdoor is engineered for powerful and precise architectural illumination. Made from extruded aluminum with a durable powder-coated finish, it offers excellent heat dissipation and corrosion resistance. Its tempered glass lens (T=4mm) ensures clear, even light output and strong impact protection. The LED lighting system provides high-efficiency performance with a CRI of 80, ensuring accurate color rendering. Operating on a 110–277V universal input, the LUSTER is rated IP65 for outdoor durability and IK06 for impact resistance. Ideal for façades, pathways, and accent applications, it combines reliability, performance, and modern design — Built for the Storm.

FIXTURE TYPE:

Linear Wall Washer

LIGHTING

LED

LED

VOLTAGE:

110-277V



MATERIAL:

Extruded aluminum

LENS:

Tempered Glass.T=4mm

CRI:

80

IP RATING:

IP 65

IP65

IK RATING:

IK 06

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:

HOW TO ORDER:

CODE:

Example:

CODE: BO-LSTR-KPG-WW-XXX-XXX-XXX-XXX-

BO-LSTR-KPG-WW-
B6KD0657-K30-B17-15-
DIM-6001#-B

1

MODELS:

CODE -B6KD0657

DIMENSIONS:

Length - L: 10" (25 cm)
Width - W: 2.63" (6.7 cm)
Height - H: 3.55" (9 cm)

LIGHT SOURCE:

LED / 6 × 1.8W / 95 mA / 700 lm / 110-277V

CODE -B6KD1257

DIMENSIONS:

Length - L: 19.3" (49 cm)
Width - W: 2.63" (6.7 cm)
Height - H: 3.55" (9 cm)

LIGHT SOURCE:

LED / 12 × 1.5W / 203 mA / 1392 lm / 110-277V

CODE -B6KD2457

DIMENSIONS:

Length - L: 38.2" (97 cm)
Width - W: 2.63" (6.7 cm)
Height - H: 3.55" (9 cm)

LIGHT SOURCE:

LED / 24 × 1.5W / 414 mA / 2780 lm / 110-277V

2

CCT OPTIONS:


-K30 3000K
-CUS Custom on request*

3


BEAM ANGLE:

-B17-15 15°
-B17-20 20°
-B17-30 30°
-B17-45 45°


-B6KD0657

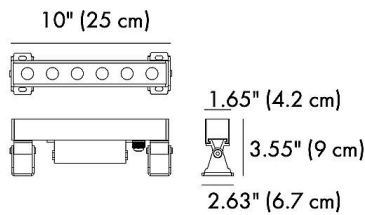

-B6KD1257

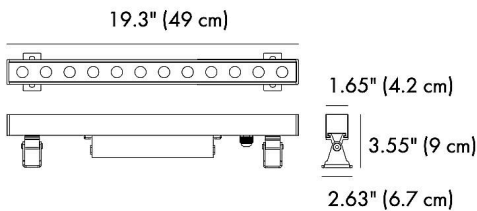

-B6KD2457

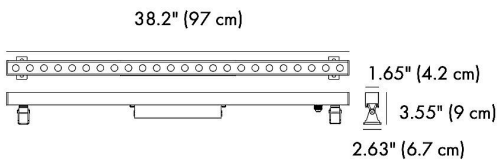

LED

110-
277V



IP65

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr


Richland, MI 49083

USA

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:

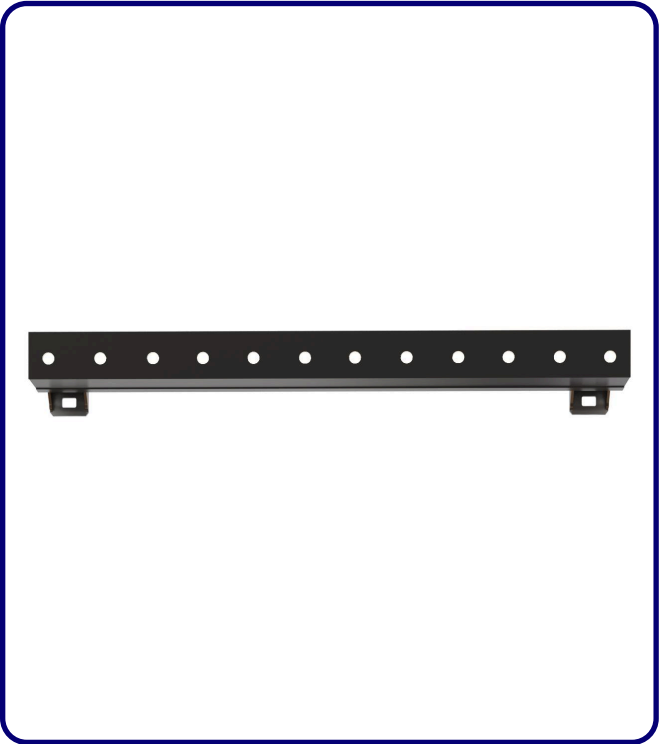

HOW TO ORDER:

CODE:

Example:
 CODE: BO-LSTR-KPG-WW-XXX-XXX-XXX-XXX-

BO-LSTR-KPG-WW-
 B6KD0657-K30-B17-15-
 DIM-6001#-B

4


DIMMING OPTIONS:

- DIM 1-10V
 -PWM Pulse Width Modulation
 -DALI DALI (Digital Addressable Lighting Interface)

5

ACCESSORIES: (optional)


-6001# Anti Glare Louver

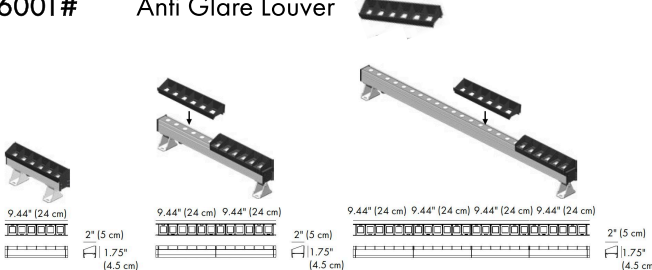

6

WATER PROOF SOLUTION: (optional)

-B



A Water-Stopper(Included)
 A IP-65 water-stopper is added in the end of luminaires as standard assembly which is also an important system for water resistance.

B IP67 Jiffy quick plug/socket connector (Option)
 A IP-67 connector is as an optional assembly and ensures that water vapor will not enter into luminaires directly.

C High voltage driver IP65

7

PHOTOMETRIC INFO:

