

SENTO MAX

Linear Wall Washer



FIXTURE TYPE: _____

PROJECT NAME: _____



GENERAL INFORMATION:

The SENTO MAX Linear Wall Washer by Bullard Outdoor delivers powerful, uniform illumination for architectural and façade lighting applications. Constructed from extruded aluminum with a high-performance powder-coated finish, it offers exceptional durability and corrosion resistance in outdoor environments. The tempered glass lens (T=4mm) ensures optimal light transmission and protection for the integrated LED system, providing consistent brightness and color with a CRI of 80. Operating on a 110–277V universal input, the SENTO MAX is rated IP65 for weather resistance and IK06 for impact protection. This linear fixture embodies Bullard’s engineering precision and modern design — Built for the Storm.

FIXTURE TYPE:

Linear Wall Washer

LIGHTING

LED

LED

VOLTAGE:

110-277V



MATERIAL:

Extruded aluminum

LENS:

Tempered Glass.T=4mm

CRI:

80

IP RATING:

IP 65

IP65

IK RATING:

IK 06

sales@gordonbullard.com
www.bullardoutdoor.com
1-877-964-4646




991 South Gull Lake Dr
Richland, MI 49083
USA

FIXTURE TYPE: _____


PROJECT NAME: _____

NOTES:

-A6LE0658

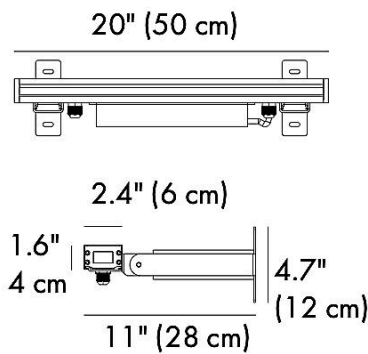

-A6LE1258

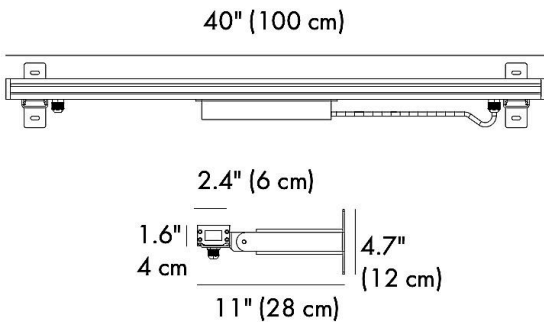

LED

110-
277V



IP65

HOW TO ORDER:

CODE:

Example:

CODE: BO-SNTX-KPG-WW-XXX-XXX-XXX-XXX-

BO-SNTX-KPG-WW-
A6LE0658-K30-A24-15-
DIM-6005#-EXBR-B

1

MODELS:

CODE -A6LE0658

DIMENSIONS:

Length -	L: 20" (50 cm)
Width -	W: 2.4" (6 cm)
Height -	H: 1.6" (4 cm)
Depth	P: 11" (28 cm)
Bracket Height -	H: 4.7" (12 cm)

LIGHT SOURCE:

LED / 6 × 4W / 222 mA / 1990 lm / 110-277V

CODE -A6LE1258

DIMENSIONS:

Length -	L: 40" (100 cm)
Width -	W: 2.4" (6 cm)
Height -	H: 1.6" (4 cm)
Depth	P: 11" (28 cm)
Bracket Height -	H: 4.7" (12 cm)

LIGHT SOURCE:

LED / 12 × 4W / 425 mA / 4108 lm / 110-277V

2

CCT OPTIONS:

-K30	3000K
-CUS	Custom on request*

3

BEAM ANGLE:

-A24-15	15°	-A24-1530	15° x 30°
-A24-30	30°	-A24-1445	15° x 45°

4

DIMMING OPTIONS:

-DIM	1-10V
-PWM	Pulse Width Modulation
-DALI	DALI (Digital Addressable Lighting Interface)

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:





HOW TO ORDER:

Example:
CODE: BO-SNTX-KPG-WW-XXX-XXX-XXX-XXX-


BO-SNTX-KPG-WW-
A6LE0658-K30-A24-15-
DIM-6005#-SUS201#-B

5 ACCESSORIES: (optional)

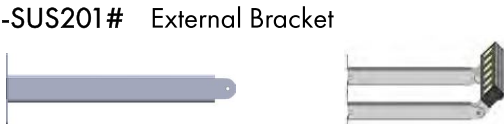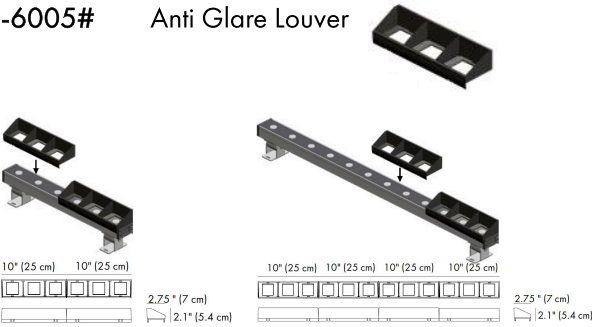

6 WATER PROOF SOLUTION: (optional)

-B IP67 Jiffy quick plug/socket connector

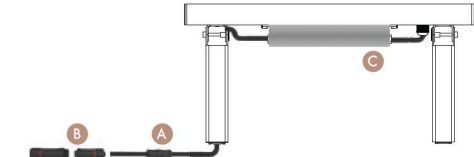

- A Water-Stopper(Included)**
A IP-65 water-stopper is added in the end of luminaires as standard assembly which is also an important system for water resistance.
- B IP67 Jiffy quick plug/socket connector(Optional)**
A IP-67 connector is as an optional assembly and ensures that water vapor will not enter into luminaires directly.
- C High voltage driver IP65**

6 WATER PROOF SOLUTION: (optional)

sales@gordonbullard.com
www.bullardoutdoor.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA