



FIXTURE TYPE: _____

PROJECT NAME: _____



GENERAL INFORMATION:

The SENTO Linear Wall Washer by Bullard Outdoor is a high-performance architectural lighting fixture designed for precise and efficient illumination. Built from extruded aluminum, it provides excellent structural integrity and heat management, ensuring long-term durability. The tempered glass lens (T=4mm) delivers superior light diffusion and impact resistance. Operating on a 110–277V universal voltage range, the LED lighting system achieves a CRI of 80, offering accurate color rendering. Rated IP65 for outdoor weather protection and IK06 for impact resistance, the SENTO is ideal for wall washing, façade lighting, and landscape applications — a reliable and refined fixture Built for the Storm.

FIXTURE TYPE:

Linear Wall Washer

LIGHTING

LED

LED

VOLTAGE:

110-277V



MATERIAL:

Extruded aluminum

LENS:

Tempered Glass. T=4mm

CRI:

80

IP RATING:

IP 65

IP65

IK RATING:

IK 06

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:

HOW TO ORDER:

CODE:

Example:

CODE: BO-SNT-KPG-WW-XXX-XXX-XXX-XXX-

BO-SNT-KPG-WW-
B6KE0657-K30-B17-17-
DIM-6001#-EXBR-B

1

MODELS:

CODE -B6KE0657

DIMENSIONS:

Length - L: 10" (25 cm)
Width - W: 2.4" (6 cm)
Height - H: 1.3" (3.5 cm)
Depth - P: 10" (25 cm)
Bracket Height - H: 4.7" (12 cm)

LIGHT SOURCE:

LED / 6 × 1.8W / 95 mA / 700 lm / 110-277V

CODE -B6KE1257

DIMENSIONS:

Length - L: 20" (50 cm)
Width - W: 2.4" (6 cm)
Height - H: 1.3" (3.5 cm)
Depth - P: 10" (25 cm)
Bracket Height - H: 4.7" (12 cm)

LIGHT SOURCE:

LED / 12 × 1.5W / 203 mA / 1392 lm / 110-277V

CODE -B6KE2457

DIMENSIONS:

Length - L: 40" (100 cm)
Width - W: 2.4" (6 cm)
Height - H: 1.3" (3.5 cm)
Depth - P: 10" (25 cm)
Bracket Height - H: 4.7" (12 cm)


LIGHT SOURCE:

LED / 24 × 1.5W / 414 mA / 2780 lm / 110-277V

3

BEAM ANGLE:

-B17-15	15°	-B17-30	30°
-B17-20	20°	-B17-40	40°

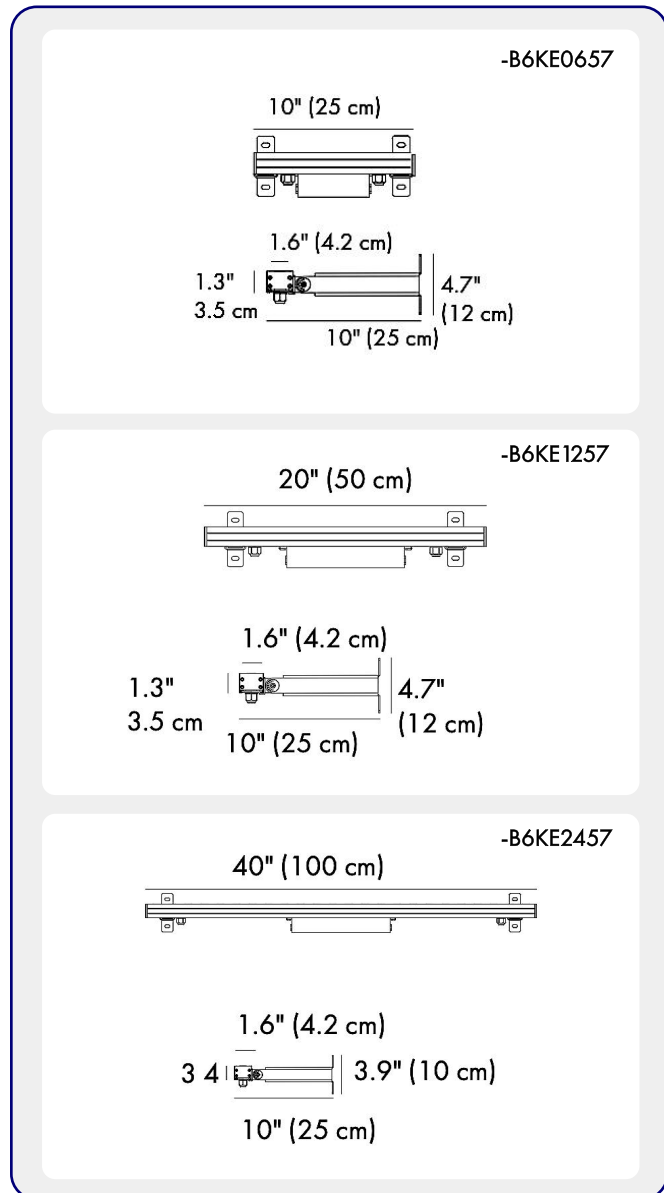

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:



HOW TO ORDER:

CODE:

Example:

CODE: BO-SNTX-KPG-WW-XXX-XXX-XXX-XXX-

BO-SNT-KPG-WW-
B6KE0657-K30-B17-17-
DIM-6001#-SUS201#-B


4

DIMMING OPTIONS:

- DIM 1-10V
- PWM Pulse Width Modulation
- DALI DALI (Digital Addressable Lighting Interface)

5

ACCESSORIES: (optional)

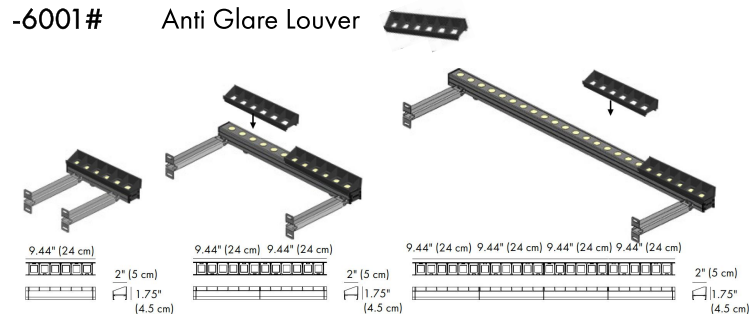


-SUS201# External Bracket



6

WATER PROOF SOLUTION: (optional)

-SUS201# IP67 Jiffy quick plug/socket connector

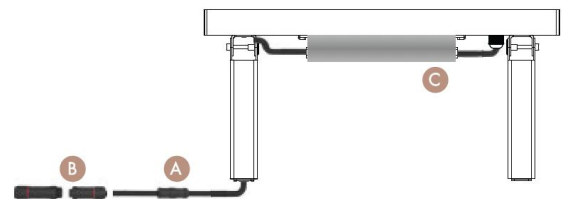

A Water-Stopper(Included)

A IP-65 water-stopper is added in the end of luminaires as standard assembly which is also an important system for water resistance.

B IP67 Jiffy quick plug/socket connector(Option)

A IP-67 connector is as an optional assembly and ensures that water vapor will not enter into luminaires directly.

C High voltage driver IP65

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

