

THE ABETO Bollard



FIXTURE TYPE: _____

PROJECT NAME: _____



GENERAL INFORMATION:

The ABETO Bollard by Bullard Outdoor combines refined design with dependable outdoor performance. Constructed from die-cast aluminum with a durable powder-coated finish, it features a PMMA diffuser that provides smooth, even illumination ideal for pathways, gardens, and architectural landscapes. Operating on a universal 110–277V input, the ABETO Bollard delivers efficient LED lighting with a CRI of 80 and is protected by an IP65 weatherproof and IK07 impact-resistant rating. Available in sanded bronze, dark gray, and black finishes.

FIXTURE TYPE:

Bollard

LIGHTING

LED

LED

VOLTAGE:

110-277V

110-277V

MATERIAL:

Die-casting powder coated aluminum

LENS:

PMMA

CRI:

80

IP RATING:

IP 65

IP65

IK RATING:

IK 07

FINISHING:

Sanded Bronze
Sanded Dark Gray
Sanded Black

BUILT FOR THE STORM

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr


Richland, MI 49083

USA

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:

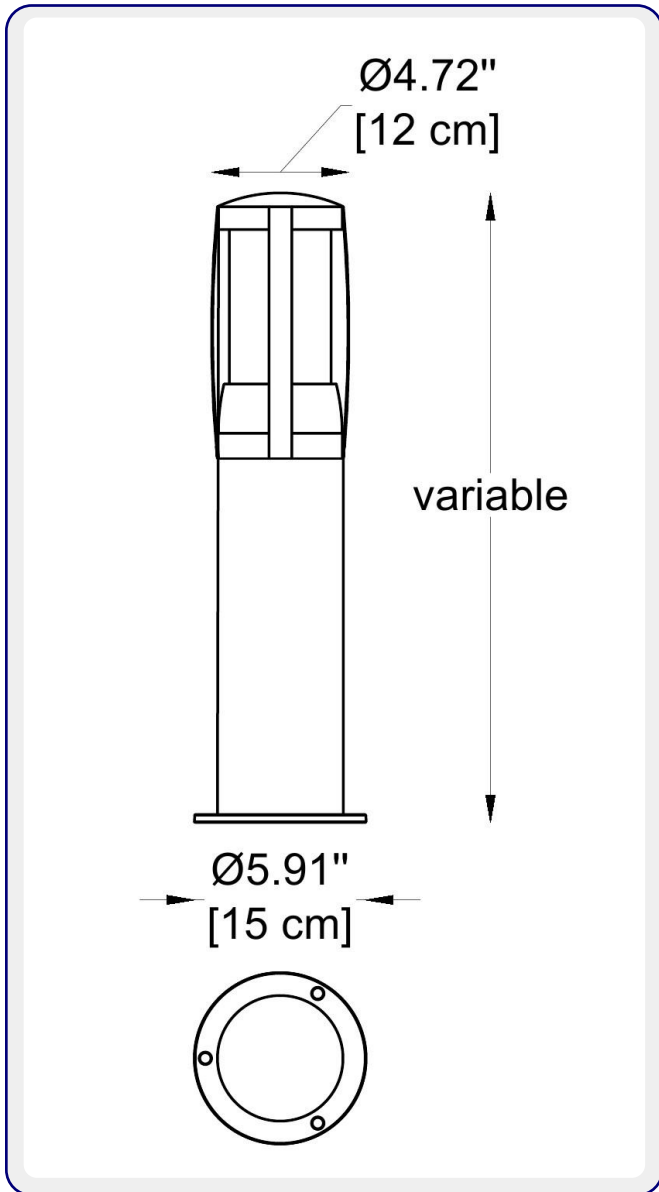

HOW TO ORDER:

CODE:

Example:
CODE: BO-AB-KPG-BL-XXX-XXX-XXX-XXX

BO-AB-KPG-BL-
D9ARL8434A-K30-
KAP7008-DIM-IB

1

MODELS:

CODE -D9ARL8434A

DIMENSIONS:

Diameter - Ø: 4.72" (12 cm)
Height - H: 15.74" (40 cm)
Base plate - Ø: 5.91" (15 cm)

CODE -D9ARM8434A

DIMENSIONS:

Diameter - Ø: 4.72" (12 cm)
Height - H: 21.65" (55 cm)
Base plate - Ø: 5.91" (15 cm)

CODE -D9ARH8434A

DIMENSIONS:

Diameter - Ø: 4.72" (12 cm)
Height - H: 31.5" (80 cm)
Base plate - Ø: 5.91" (15 cm)

2

LIGHT SOURCE:

LED / 9.4W / 79 mA / 497 lm / 110-277V

3

CCT OPTIONS:

-K30 3000K
-CUS Custom on request*

4

FINISH OPTIONS:

-KAP7008 Sanded Bronze
-KAP7037 Sanded Dark Gray
-RAL9005 Sanded Black

5

DIMMING OPTIONS:

-DIM 1-10V
-PWM Pulse Width Modulation
-DALI DALI (Digital Addressable Lighting Interface)

sales@gordonbullard.com
www.bullardoutdoor.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA



Updated 10/15/2025