




FIXTURE TYPE: _____

PROJECT NAME: _____

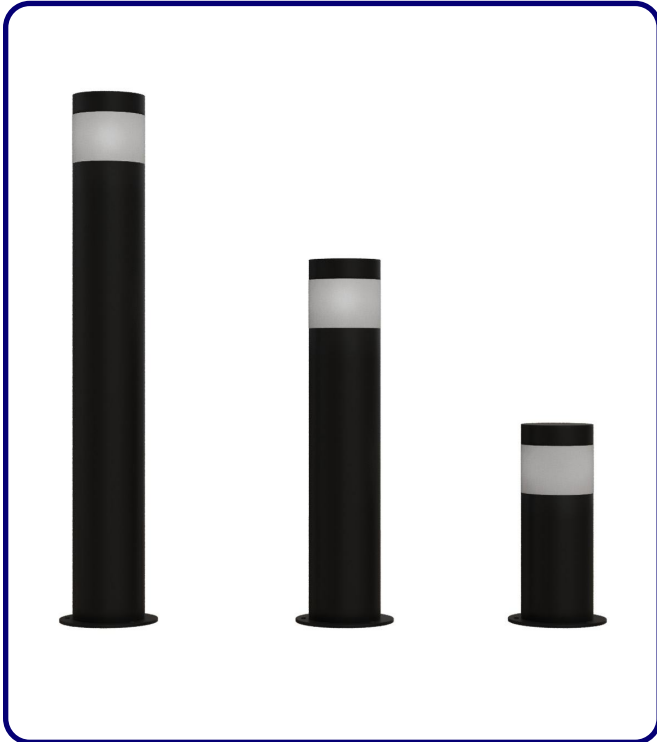

GENERAL INFORMATION:

The ARCE Bollard by Bullard Outdoor is a sleek and durable LED fixture designed for outdoor pathways, landscapes, and architectural spaces. Crafted from die-cast aluminum with a sanded finish in bronze, dark gray, or black, it offers reliable illumination with a CRI of 80 and a PMMA diffuser for even light distribution. Operating on a universal 110–277V input, the ARCE Bollard is built to withstand harsh environments with an IP66 weatherproof and IK07 impact-resistant rating—delivering performance and style.

FIXTURE TYPE:

Bollard

LIGHTING

LED

LED

VOLTAGE:

110-277V

110-277V

MATERIAL:

Die-casting powder coated aluminum

LENS:

PMMA

CRI:

80

IP RATING:

IP 65

IP65

IK RATING:

IK 07

FINISHING:

Sanded Bronze
Sanded Dark Gray
Sanded Black

BUILT FOR THE STORM

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr


Richland, MI 49083

USA

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:

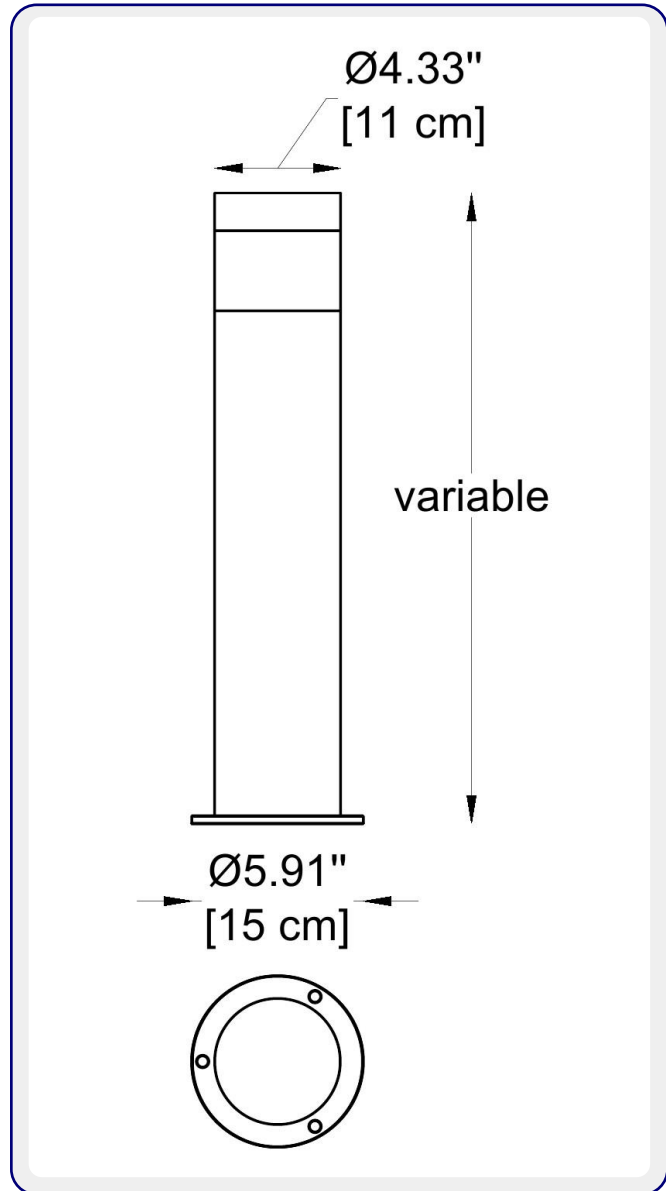

HOW TO ORDER:

CODE:

Example:
CODE: BO-AR-KPG-BL-XXX-XXX-XXX-XXX

BO-AR-KPG-BL-
D9ADL4234A-K30-
KAP7008-DIM-IB

1

MODELS:

CODE -D9ADL4234A

DIMENSIONS:

Diameter - Ø: 4.33" (11 cm)
Height - H: 11.81" (30 cm)
Base plate - Ø: 5.91" (15 cm)

CODE -D9ADM4234A

DIMENSIONS:

Diameter - Ø: 4.33" (11 cm)
Height - H: 21.65" (55 cm)
Base plate - Ø: 5.91" (15 cm)

CODE -D9ADH4234A

DIMENSIONS:

Diameter - Ø: 4.33" (11 cm)
Height - H: 31.5" (80 cm)
Base plate - Ø: 5.91" (15 cm)

2

LIGHT SOURCE:

LED / 8.6W / 76 mA / 586 lm / 110-277V

3

CCT OPTIONS:

-K30 3000K
-CUS Custom on request*

4

FINISH OPTIONS:

-KAP7008 Sanded Bronze
-KAP7037 Sanded Dark Gray
-RAL9005 Sanded Black

5

DIMMING OPTIONS:

-DIM 1-10V
-PWM Pulse Width Modulation
-DALI DALI (Digital Addressable Lighting Interface)


sales@gordonbullard.com
www.bullardoutdoor.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA



NOTES:

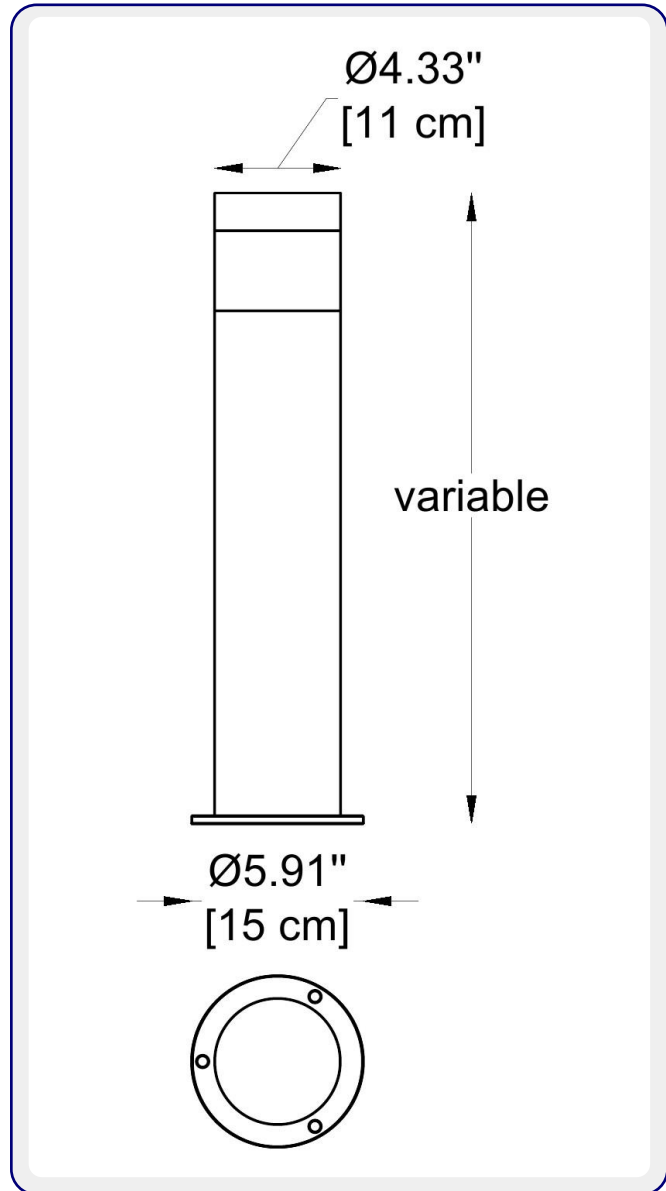

CODE:

BO-AR-KPG-BL-
D9ADL4234A-K30-
KAP7008-DIM-IB

-SB	Screw Base (included)
-IB	Inground Base (optional)
-GAB	Ground Anchor Base (optional)

Figure 1 consists of four parts: a top-down view of the LED lighting fixture, a circular light distribution diagram, a line graph of light distribution curves, and a table of beam width data.

The top-down view shows the fixture with dimensions: 10.500" (266.7mm) and 10.500" (266.7mm). The circular light distribution diagram shows the beam spread at various distances: 1.0m, 2.0m, 3.0m, 4.0m, 5.0m, 6.0m, 7.0m, 8.0m, 9.0m, 10.0m, 11.0m, 12.0m, 13.0m, 14.0m, 15.0m, 16.0m, 17.0m, 18.0m, 19.0m, 20.0m, 21.0m, 22.0m, 23.0m, 24.0m, 25.0m, 26.0m, 27.0m, 28.0m, 29.0m, 30.0m, 31.0m, 32.0m, 33.0m, 34.0m, 35.0m, 36.0m, 37.0m, 38.0m, 39.0m, 40.0m, 41.0m, 42.0m, 43.0m, 44.0m, 45.0m, 46.0m, 47.0m, 48.0m, 49.0m, 50.0m, 51.0m, 52.0m, 53.0m, 54.0m, 55.0m, 56.0m, 57.0m, 58.0m, 59.0m, 60.0m, 61.0m, 62.0m, 63.0m, 64.0m, 65.0m, 66.0m, 67.0m, 68.0m, 69.0m, 70.0m, 71.0m, 72.0m, 73.0m, 74.0m, 75.0m, 76.0m, 77.0m, 78.0m, 79.0m, 80.0m, 81.0m, 82.0m, 83.0m, 84.0m, 85.0m, 86.0m, 87.0m, 88.0m, 89.0m, 90.0m, 91.0m, 92.0m, 93.0m, 94.0m, 95.0m, 96.0m, 97.0m, 98.0m, 99.0m, 100.0m, 101.0m, 102.0m, 103.0m, 104.0m, 105.0m, 106.0m, 107.0m, 108.0m, 109.0m, 110.0m, 111.0m, 112.0m, 113.0m, 114.0m, 115.0m, 116.0m, 117.0m, 118.0m, 119.0m, 120.0m, 121.0m, 122.0m, 123.0m, 124.0m, 125.0m, 126.0m, 127.0m, 128.0m, 129.0m, 130.0m, 131.0m, 132.0m, 133.0m, 134.0m, 135.0m, 136.0m, 137.0m, 138.0m, 139.0m, 140.0m, 141.0m, 142.0m, 143.0m, 144.0m, 145.0m, 146.0m, 147.0m, 148.0m, 149.0m, 150.0m, 151.0m, 152.0m, 153.0m, 154.0m, 155.0m, 156.0m, 157.0m, 158.0m, 159.0m, 160.0m, 161.0m, 162.0m, 163.0m, 164.0m, 165.0m, 166.0m, 167.0m, 168.0m, 169.0m, 170.0m, 171.0m, 172.0m, 173.0m, 174.0m, 175.0m, 176.0m, 177.0m, 178.0m, 179.0m, 180.0m, 181.0m, 182.0m, 183.0m, 184.0m, 185.0m, 186.0m, 187.0m, 188.0m, 189.0m, 190.0m, 191.0m, 192.0m, 193.0m, 194.0m, 195.0m, 196.0m, 197.0m, 198.0m, 199.0m, 200.0m, 201.0m, 202.0m, 203.0m, 204.0m, 205.0m, 206.0m, 207.0m, 208.0m, 209.0m, 210.0m, 211.0m, 212.0m, 213.0m, 214.0m, 215.0m, 216.0m, 217.0m, 218.0m, 219.0m, 220.0m, 221.0m, 222.0m, 223.0m, 224.0m, 225.0m, 226.0m, 227.0m, 228.0m, 229.0m, 230.0m, 231.0m, 232.0m, 233.0m, 234.0m, 235.0m, 236.0m, 237.0m, 238.0m, 239.0m, 240.0m, 241.0m, 242.0m, 243.0m, 244.0m, 245.0m, 246.0m, 247.0m, 248.0m, 249.0m, 250.0m, 251.0m, 252.0m, 253.0m, 254.0m, 255.0m, 256.0m, 257.0m, 258.0m, 259.0m, 260.0m, 261.0m, 262.0m, 263.0m, 264.0m, 265.0m, 266.0m, 267.0m, 268.0m, 269.0m, 270.0m, 271.0m, 272.0m, 273.0m, 274.0m, 275.0m, 276.0m, 277.0m, 278.0m, 279.0m, 280.0m, 281.0m, 282.0m, 283.0m, 284.0m, 285.0m, 286.0m, 287.0m, 288.0m, 289.0m, 290.0m, 291.0m, 292.0m, 293.0m, 294.0m, 295.0m, 296.0m, 297.0m, 298.0m, 299.0m, 300.0m, 301.0m, 302.0m, 303.0m, 304.0m, 305.0m, 306.0m, 307.0m, 308.0m, 309.0m, 310.0m, 311.0m, 312.0m, 313.0m, 314.0m, 315.0m, 316.0m, 317.0m, 318.0m, 319.0m, 320.0m, 321.0m, 322.0m, 323.0m, 324.0m, 325.0m, 326.0m, 327.0m, 328.0m, 329.0m, 330.0m, 331.0m, 332.0m, 333.0m, 334.0m, 335.0m, 336.0m, 337.0m, 338.0m, 339.0m, 340.0m, 341.0m, 342.0m, 343.0m, 344.0m, 345.0m, 346.0m, 347.0m, 348.0m, 349.0m, 350.0m, 351.0m, 352.0m, 353.0m, 354.0m, 355.0m, 356.0m, 357.0m, 358.0m, 359.0m, 360.0m, 361.0m, 362.0m, 363.0m, 364.0m, 365.0m, 366.0m, 367.0m, 368.0m, 369.0m, 370.0m, 371.0m, 372.0m, 373.0m, 374.0m, 375.0m, 376.0m, 377.0m, 378.0m, 379.0m, 380.0m, 381.0m, 382.0m, 383.0m, 384.0m, 385.0m, 386.0m, 387.0m, 388.0m, 389.0m, 390.0m, 391.0m, 392.0m, 393.0m, 394.0m, 395.0m, 396.0m, 397.0m, 398.0m, 399.0m, 400.0m, 401.0m, 402.0m, 403.0m, 404.0m, 405.0m, 406.0m, 407.0m, 408.0m, 409.0m, 410.0m, 411.0m, 412.0m, 413.0m, 414.0m, 415.0m, 416.0m, 417.0m, 418.0m, 419.0m, 420.0m, 421.0m, 422.0m, 423.0m, 424.0m, 425.0m, 426.0m, 427.0m, 428.0m, 429.0m, 430.0m, 431.0m, 432.0m, 433.0m, 434.0m, 435.0m, 436.0m, 437.0m, 438.0m, 439.0m, 440.0m, 441.0m, 442.0m, 443.0m, 444.0m, 445.0m, 446.0m, 447.0m, 448.0m, 449.0m, 450.0m, 451.0m, 452.0m, 453.0m, 454.0m, 455.0m, 456.0m, 457.0m, 458.0m, 459.0m, 460.0m, 461.0m, 462.0m, 463.0m, 464.0m, 465.0m, 466.0m, 467.0m, 468.0m, 469.0m, 470.0m, 471.0m, 472.0m, 473.0m, 474.0m, 475.0m, 476.0m, 477.0m, 478.0m, 479.0m, 480.0m, 481.0m, 482.0m, 483.0m, 484.0m, 485.0m, 486.0m, 487.0m, 488.0m, 489.0m, 490.0m, 491.0m, 492.0m, 493.0m, 494.0m, 495.0m, 496.0m, 497.0m, 498.0m, 499.0m, 500.0m, 501.0m, 502.0m, 503.0m, 504.0m, 505.0m, 506.0m