









FIXTURE TYPE:		
PROJECT NAM	۱E:	











GENERAL INFORMATION:

The GUIDE Bollard by Bullard Outdoor features a distinctive angled head design that provides precise, directional illumination ideal for pathways and architectural landscapes. Constructed from die-cast aluminum with a durable powder-coated finish, it ensures strength, corrosion resistance, and long-lasting performance. Its PMMA lens delivers controlled, glare-free light, powered by efficient LED technology with a CRI of 80. Operating on a universal 110–277Vinput, the GUIDE Bollard is IP65 weatherproof and IK07 impact resistant, built to withstand demanding outdoor conditions. Available in sanded bronze, dark gray, and black finishes

FIXTURE TYPE: Bollard LIGHTING LED LED **VOLTAGE:** 110-277V **MATERIAL:** Die-casting powder coated aluminum LENS: **PMMA** CRI: 80 **IP RATING:** IP 65 IP65 **IK RATING:**

IK 07

FINISHING:

Sanded Bronze Sanded Dark Gray Sanded Black

BUILT FOR THE STORM


sales@gordonbullard.com www.bullardoutdoor.com 1-877-964-4646



991 South Gull Lake Dr Richland, MI 49083 USA



FIXTURE TYPE:	
PROJECT NAME:	
NOTES:	

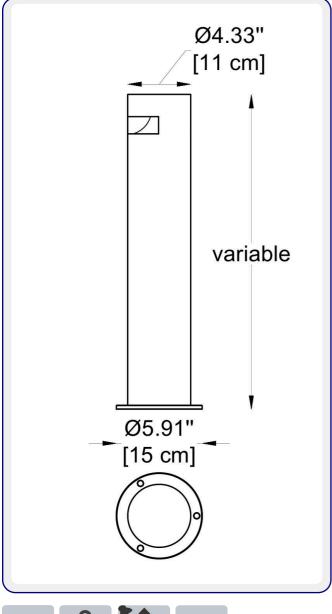



sales@gordonbullard.com www.bullardoutdoor.com 1-877-964-4646



CODE:

Example:

CODE: BO-GDE-KPG-BL-XXX-XXX-XXXX-XXXX

BO-GDE-KPG-BL-D9AFL1234-K30-KAP7008-DIM-IB

1 MODELS:

CODE -D9AFL1234

DIMENSIONS:

Diameter - Ø: 4.33" (11 cm)

Height - H: 11.81" (30 cm)

Base plate - Ø: 5.91" (15 cm)

CODE -D9AFM1234

DIMENSIONS:

 Diameter Ø: 4.33" (11 cm)

 Height H: 21.65" (55 cm)

 Base plate Ø: 5.91" (15 cm)

CODE -D9AFH1234

DIMENSIONS:

Diameter - Ø: 4.33" (11 cm)

Height - H: 31.5" (80 cm)

Base plate - Ø: 5.91" (15 cm)

2 LIGHT SOURCE:

LED / 7W / 60 mA / 168 lm / 110-277V

3 CCT OPTIONS:

-K30 3000K

-CUS Custom on request*

4 FINISH OPTIONS:

-KAP7008 Sanded Bronze -KAP7037 Sanded Dark Gray -RAL9005 Sanded Black

5 DIMMING OPTIONS:

-DIM 1-10V

-PWM Pulse Width Modulation


-DALI DALI (Digital Addressable Lighting Interface)



991 South Gull Lake Dr Richland, MI 49083 USA



OTEC:		
roject name: _ otes:		
ROJECT NAME: _		

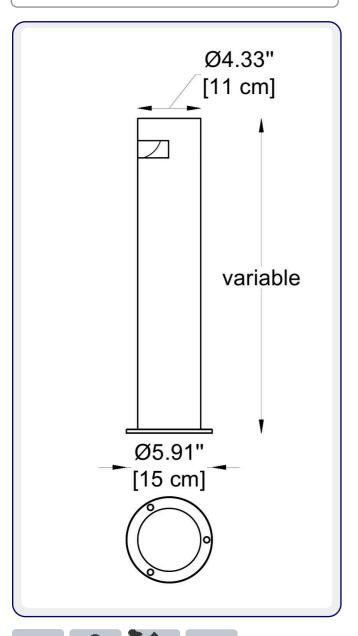

HOW TO ORDER:


Example:
CODE: BO-GDE-KPG-BL-XXX-XXX-XXX-XXX

BO-GDE-KPG-BL-D9AFL1234-K30-KAP7008-DIM-IB

6 INSTALLATION TYPE:

-SB Screw Base (included)
 -IB Inground Base (optional)
 -GAB Ground Anchor Base (optional)

7 PHOTOMATRIC INFO:



sales@gordonbullard.com www.bullardoutdoor.com 1-877-964-4646



991 South Gull Lake Dr Richland, MI 49083 USA