

THE NAVI DOUBLE Bollard



FIXTURE TYPE: _____

PROJECT NAME: _____



GENERAL INFORMATION:

The NAVI DOUBLE Bollard by Bullard Outdoor delivers powerful dual-directional illumination in a refined, modern form. Designed for expansive outdoor spaces, it features two adjustable LED heads that provide wide and balanced light coverage. Constructed from die-cast aluminum with a resilient powder-coated finish, it ensures long-lasting durability and weather resistance. The PMMA lens delivers smooth, efficient illumination with a CRI of 80, while the 110–277V universal input guarantees compatibility across various installations. Rated IP65 for weather protection and IK05 for impact resistance, the NAVI DOUBLE Bollard is available in sanded bronze, dark gray.

FIXTURE TYPE:

Bollard

LIGHTING

LED

LED

VOLTAGE:

110-277V

110-277V

MATERIAL:

Die-casting powder coated aluminum

LENS:

PMMA

CRI:

80

IP RATING:

IP 65

IP65

IK RATING:

IK 08

FINISHING:

Sanded Bronze
Sanded Dark Gray
Sanded Black

BUILT FOR THE STORM

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr


Richland, MI 49083

USA

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:

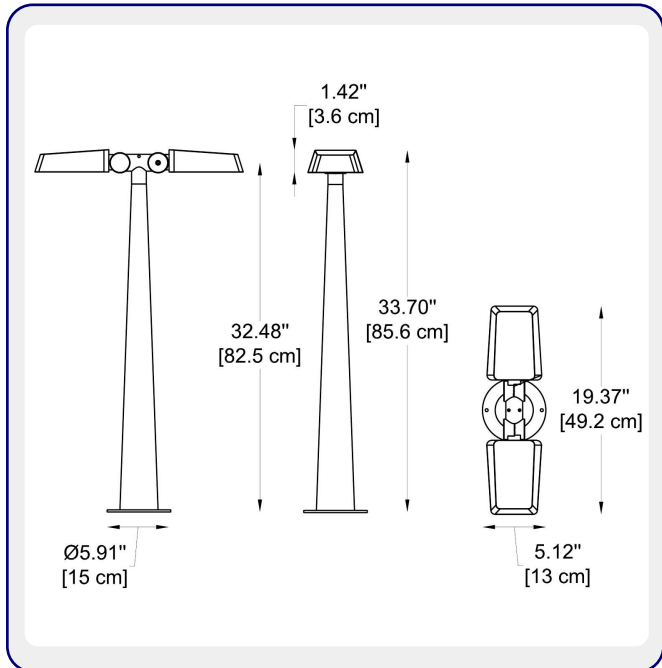

HOW TO ORDER:

CODE:

Example:

CODE: BO-NVD-KPG-BL-XXX-XXX-XXX-XXX-XXX

BO-NVD-KPG-BL-
B9AZM1657-K30-
KAP7008-DIM-IB--A10-10

1

MODEL:

CODE **-B9AZM1657**

2

DIMENSIONS:

Height - H: 33.7" (85.6 cm)

Base plate - Ø: 5.12" (13 cm)

3

LIGHT SOURCE:

LED / 28W / 124 mA / 2420 lm / 110-277V

4

CCT OPTIONS:

-K30 3000K

-CUS Custom on request*

5

FINISH OPTIONS:

-KAP7008 Sanded Bronze

-KAP7037 Sanded Dark Gray

-RAL9005 Sanded Black

6

DIMMING OPTIONS:

-DIM 1-10V

-PWM Pulse Width Modulation

-DALI DALI (Digital Addressable Lighting Interface)

7

INSTALLATION TYPE:

-SB Screw Base (included)

-IB Inground Base (optional)

-GAB Ground Anchor Base (optional)

8

BEAM ANGLE:

-A10-10 10°

-A10-20 20°

-A10-50 50°

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA



Lux distance curve

	Illuminance at a distance	
	Center beam LUX	Beam width V H
2m	290.04 LUX	2.1m 2.1m
4m	72.51 LUX	4.3m 4.2m
6m	32.23 LUX	6.4m 6.4m
8m	18.13 LUX	8.5m 8.5m
10m	11.60 LUX	10.7m 10.6m
12m	8.06 LUX	12.8m 12.7m

Vert Spread: 56.1 Horiz Spread: 55.8



USA

Updated 10/15/2025