

THE WASAT DOUBLE Bollard



FIXTURE TYPE: _____

PROJECT NAME: _____



GENERAL INFORMATION:

The WASAT DOUBLE Bollard by Bullard Outdoor delivers a bold, architectural statement with its dual-head design, providing balanced illumination for large outdoor spaces. Engineered from die-cast aluminum with a durable powder-coated finish, it ensures long-lasting performance and resistance to harsh environments. The fixture's PMMA lens diffuses light smoothly and evenly, powered by efficient LED technology with a CRI of 80 for natural color rendering. Designed to operate on 110–277V, the WASAT DOUBLE offers IP65 weather protection and IK05 impact resistance, making it ideal for pathways, plazas, and modern landscapes. Available in sanded bronze, dark gray, and black finishes.

FIXTURE TYPE:

Bollard

LIGHTING

LED

LED

VOLTAGE:

110-277V



MATERIAL:

Die-casting powder coated aluminum

LENS:

PMMA

CRI:

80

IP RATING:

IP 65

IP65

IK RATING:

IK 05

FINISHING:

Sanded Bronze
Sanded Dark Gray
Sanded Black

BUILT FOR THE STORM

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr


Richland, MI 49083

USA

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:

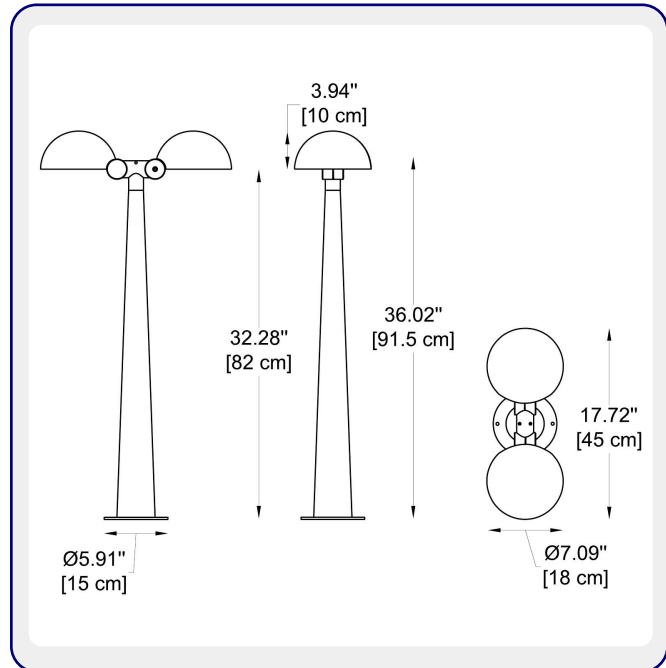

HOW TO ORDER:

CODE:

Example:

CODE: BO-WSTD-KPG-BL-XXX-XXX-XXX-XXX-XXX

BO-WSTD-KPG-BL-
D9AYM6034-K30-
KAP7008-DIM-IB

1

MODEL:

CODE -D9AYM6034

2

DIMENSIONS:

Height - H: 36" (91.5 cm)

Base plate - Ø: 5.91" (15 cm)

3

LIGHT SOURCE:

LED / 39W / 180 mA / 4108 lm / 110-277V

4

CCT OPTIONS:

-K30 3000K

-CUS Custom on request*

5

FINISH OPTIONS:

-KAP7008 Sanded Bronze

-KAP7037 Sanded Dark Gray

-RAL9005 Sanded Black

6

DIMMING OPTIONS:

-DIM 1-10V

-PWM Pulse Width Modulation

-DALI DALI (Digital Addressable Lighting Interface)

7

INSTALLATION TYPE:


-SB Screw Base (included)

-IB Inground Base (optional)

-GAB Ground Anchor Base (optional)

8

PHOTOMETRIC INFO:

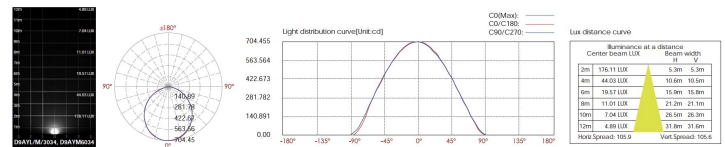

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA