

ALCOR Spotlight - Medium Power Spotlights









FIXTURE TYPE: _____

PROJECT NAME: _











GENERAL INFORMATION:

The ALCOR Medium Power Spotlight by Bullard Outdoor is a robust LED fixture crafted from 12# die-cast aluminum with a tempered glass lens (T=3mm). Operating on 110–277V, it provides efficient, high-quality illumination with a CRI of 80. Rated IP66 and IK07, it ensures durability and performance in any outdoor environment. Available in Sanded Bronze, Dark Gray, Black, and White finishes, ALCOR delivers reliable, stylish lighting for architectural and landscape applications.

FIXTURE TYPE:

Spotlight - Medium Power Spotlights

LIGHTING

LED

VOLTAGE:

110-277V

MATERIAL:

12# Die-casting aluminum finishing

LENS:

Tempered glass.T=3mm

CRI:

80

IP RATING:

IP 66

IP66

LED

IK RATING:

IK 07

FINISHING:

Sanded Bronze

Sanded Dark Gray

Sanded Black

Sanded White

CABLE GLAND:

IP68 PG-9 PA66


sales@gordonbullard.com www.bullardoutdoor.com 1-877-964-4646





CODE: BO-ALR-KPG-SPT

PROJECT NAME: __________NOTES:

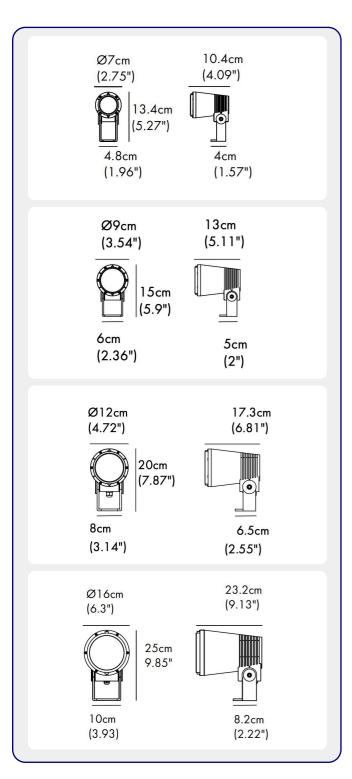

HOW TO ORDER: CODE:

Example:

CODE: BO-ALR-KPG-SPT-XXX-XXX-XXXX-XXXX

BO-ALR-KPG-SPT-R3EJU0126-K30-KAP7008-DIM-R8-15-B-17B-CA3022

1 MODELS:

CODE -R3EJU0126

DIMENSIONS:

Diameter - Ø: 2.75" (7 cm)

Height - H: 5.27" (13.4 cm)

Length - L: 4.09" (10.4 cm)

LIGHT SOURCE:

 $LED / 1 \times 6W / 65 \text{ mA} / 646 \text{ lm} / 110-277V$

CODE -R3DJU0169

DIMENSIONS:

Diameter - Ø: 3.54" (9 cm)
Height - H: 5.9" (15 cm)
Length - L: 5.11" (13 cm)

LIGHT SOURCE:

LED / 1 x 16W / 145 mA / 1763 lm / 110-277V

CODE -R3CJU0171

DIMENSIONS:

Diameter - Ø: 4.72" (12 cm)

Height - H: 7.87" (20 cm)

Length - L: 6.81" (17.3 cm)

LIGHT SOURCE:

LED / 1 x 12W / 205 mA / 2409 lm / 110-277V

CODE -R3BJU0176

DIMENSIONS:

Diameter - Ø: 6.3" (16 cm)

Height - H: 9.85" (25 cm)

Length - L: 9.13" (23.2 cm)

LIGHT SOURCE:

LED $/ 1 \times 40W / 372 \text{ mA} / 4455 \text{ lm} / 110-277V / 25^{\circ}$

sales@gordonbullard.com www.bullardoutdoor.com 1-877-964-4646





EIVTLIDE TVDE.

INTORL TITL.	_
ROJECT NAME:	_
NOTES:	













CODE:

Example:

CODE: BO-ALR-KPG-SPT-XXX-XXX-XXXX-XXX

BO-ALR-KPG-SPT-R3EJU0126-K30-KAP7008-DIM-R8-15-B-17B-CA3022

CCT OPTIONS:

-K30 3000K

-CUS Custom on request*

3 FINISH OPTIONS:

> -KAP7008 Sanded Bronze -KAP7037 Sanded Dark Gray -RAL 9005 Sanded Black -RAL9003 Sanded White

DIMMING OPTIONS: 4

> 1-10V -DIM

-PWM Pulse Width Modulation

-DALI DALI (Digital Addressable Lighting Interface)

BEAM ANGLE: 5

available or	ly for	available only for		available only for	
-R3EJU0126 model		-R3DJU0169 model		-R3CJU0171 model	
-R8-15	15°	-R 1 <i>7</i> -12	12°	-R19-10	10°
-R8-24	24°	-R1 <i>7</i> -18	18°	-R19-22	22°
-R8-38	38°	-R17-32	32°	-R19-38	38°
-R8-60	60°				

WATER PROOF SOLUTION: (optional)

A Water-Stopper(Included)

A IP-66 water-stopper is added in the end of luminaires as standard assembly which is also an important system for water resistance.

B IP67 Jiffy quick plug/socket connector(Option) A IP-67 connector is as an optional assembly and ensures that water vapor will not enter into luminaires directly.



sales@gordonbullard.com www.bullardoutdoor.com 1-877-964-4646



6

-B



FIXTURE TYPE:	
PROJECT NAME:	
notes:	





HOW TO ORDER:

CODE:

Example:

CODE: BO-ALR-KPG-SPT-XXX-XXX-XXXX-XXX

BO-ALR-KPG-SPT-R3EJU0126-K30-KAP7008-DIM-R8-15-B-17B-CA3022


ACCESSORIES: 6

SPIKE - PC-ABS alloys

-17B -18C








-18C for R3EJU0126, R3DJU0169 models



-13B -12C







-13B for -R3EJU0126, -R3DJU0169 models




TREE POLE STRAP

-RD003

-RD002







-RD003 for -R3EJU0126, -R3DJU0169 models



BEVEL CUT HOOD

-CA3022 -CA3022 -CA3022 -CA3022











sales@gordonbullard.com www.bullardoutdoor.com 1-877-964-4646







Example:

CODE: BO-ALR-KPG-SPT-XXX-XXX-XXXX-XXX


BO-ALR-KPG-SPT-R3EJU0126-K30-KAP7008-DIM-R8-15-B-17B-CA3022





Gear: The gear between the lumianire housing and the U bracket to prevent sliding.

8 PHOTOMATRIC INFO:

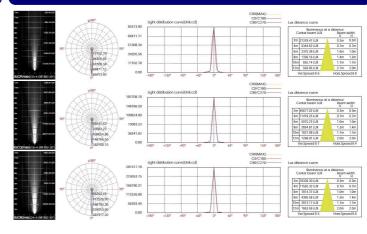











sales@gordonbullard.com www.bullardoutdoor.com 1-877-964-4646

