



BLAZE
Recessed Wall Luminaires
Stair / Pathway Luminaires

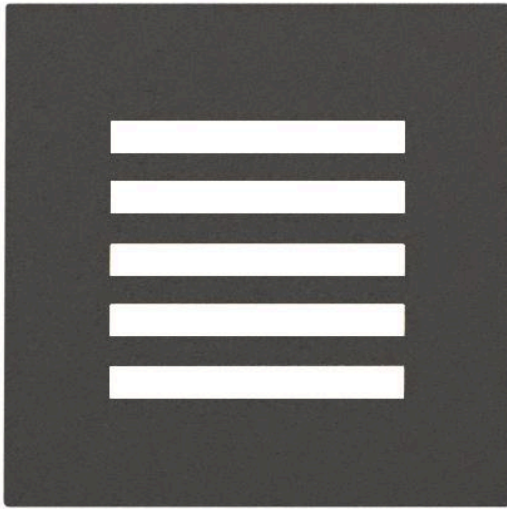

FIXTURE TYPE: _____

PROJECT NAME: _____

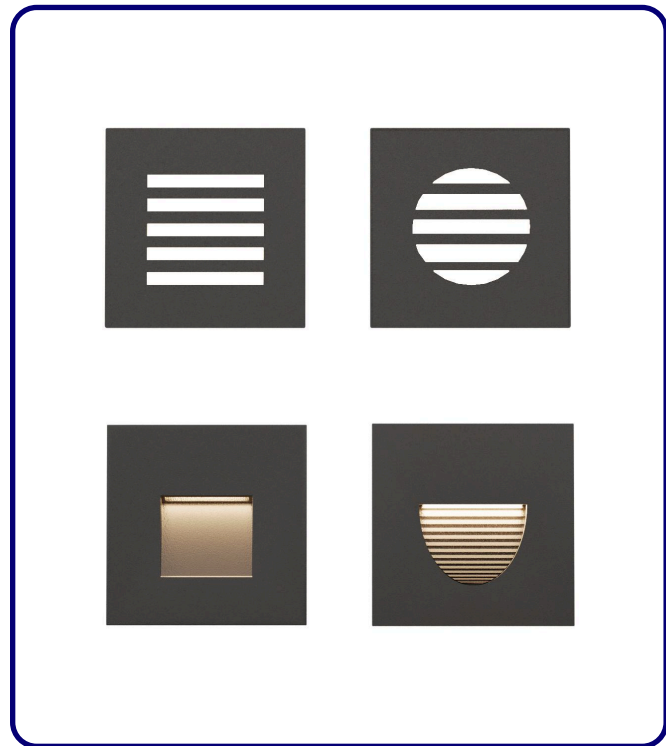

GENERAL INFORMATION:

The BLAZE Recessed Wall Luminaire by Bullard Outdoor is a durable and stylish LED fixture designed for stair and pathway lighting. Made from die-cast aluminum with a hard chrome-plated stainless steel 316L finish, it combines strength with a refined architectural look. Operating on 110–277V, BLAZE features a UV-stable, fireproof PC lens for consistent illumination and durability. Rated IP65 for weather resistance and IK09/IK10 for impact protection, it's ideal for demanding environments.

FIXTURE TYPE:

Recessed Wall Luminaires - Stair/Pathway Luminaires

LIGHTING:

LED

LED

VOLTAGE:

110-277V



MATERIAL:

D1HA1034, D1HB1034: 12# Die-casting aluminum powder coated
D1HE1634, D1HC1634: Hard chromeplated Stainless steel 316#

LENS:

UVstop & Fireproof PC

CABLE GLAND:

IP67 copper and nicked coated

RECESSED SLEEVE:

PC/ABS ALLOYS 092#

IP RATING:

IP 65

IP65

IK RATING:

IK 09 / IK 10

FINISHING:

Sanded Dark Gray
Sanded Black
Sanded White

sales@gordonbullard.com
www.bullardoutdoor.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA

FIXTURE TYPE: _____

PROJECT NAME: _____

HOW TO ORDER:

CODE:

Example:

CODE: BO-BLZ-KPG-RWL-XXX-XXX-XXX-XXX-XXX-XX

BO-BLZ-KPG-RWL-
D1HC1634-K30-
KAP7037-DIM

1

MODELS:

CODE -D1HC1634

DIMENSIONS:

Length - L: 3.93" (10 cm)

Height - H: 3.93" (10 cm)

Depth - P: 3.3" (8.4 cm)

LIGHT SOURCE:

LED / 10 x 0.5W / 58 mA / 32 lm / CRI 80 / IK 09

CODE -D1HE1634

DIMENSIONS:

Length - L: 3.93" (10 cm)

Height - H: 3.93" (10 cm)

Depth - P: 3.3" (8.4 cm)

LIGHT SOURCE:

LED / 10 x 0.5W / 58 mA / 45 lm / CRI 80 / IK 09

CODE -D1HB1034

DIMENSIONS:

Length - L: 3.93" (10 cm)

Height - H: 3.93" (10 cm)

Depth - P: 3.3" (8.5 cm)

LIGHT SOURCE:

LED / 16 x 0.2W / 100 mA / 123 lm / CRI 80 / IK 10

CODE -D1HA1034

DIMENSIONS:


Length - L: 3.93" (10 cm)

Height - H: 3.93" (10 cm)

Depth - P: 3.3" (8.5 cm)

LIGHT SOURCE:

LED / 16 x 0.2W / 100 mA / 112.9 lm / CRI 80 / IK 10

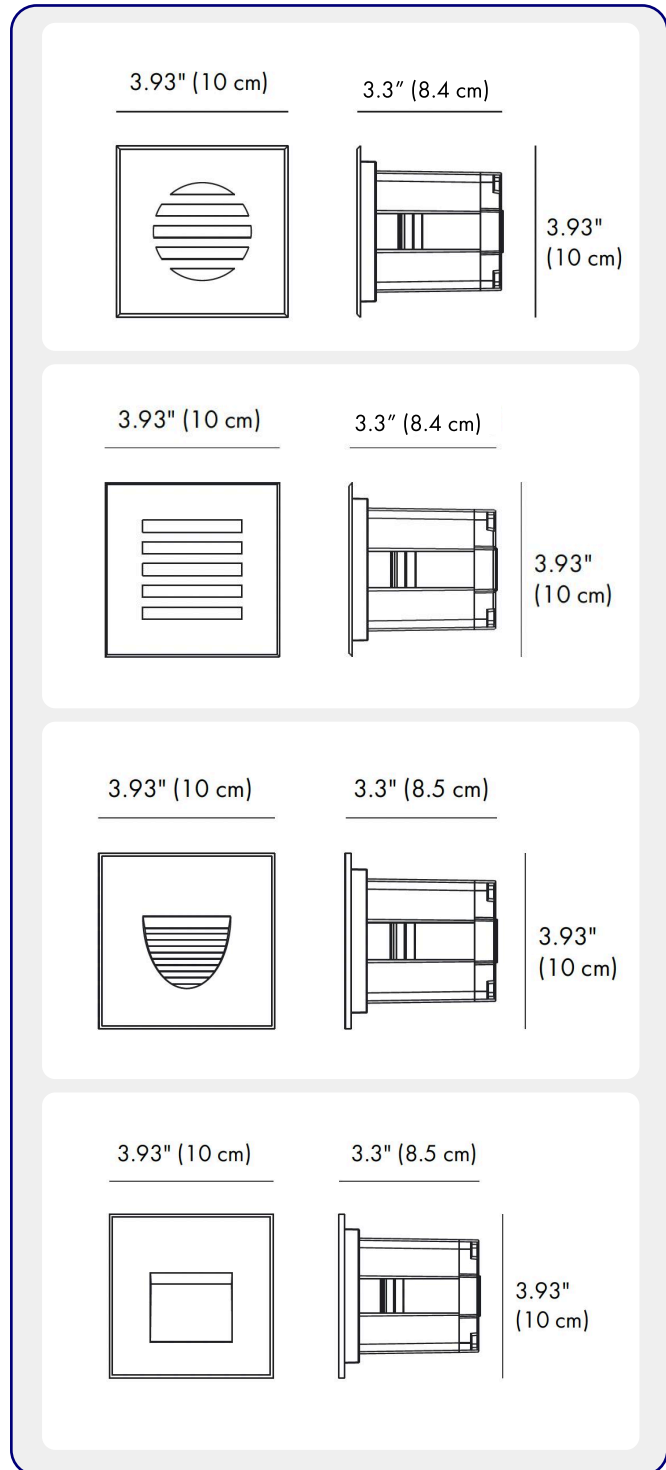

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr


Richland, MI 49083

USA

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:

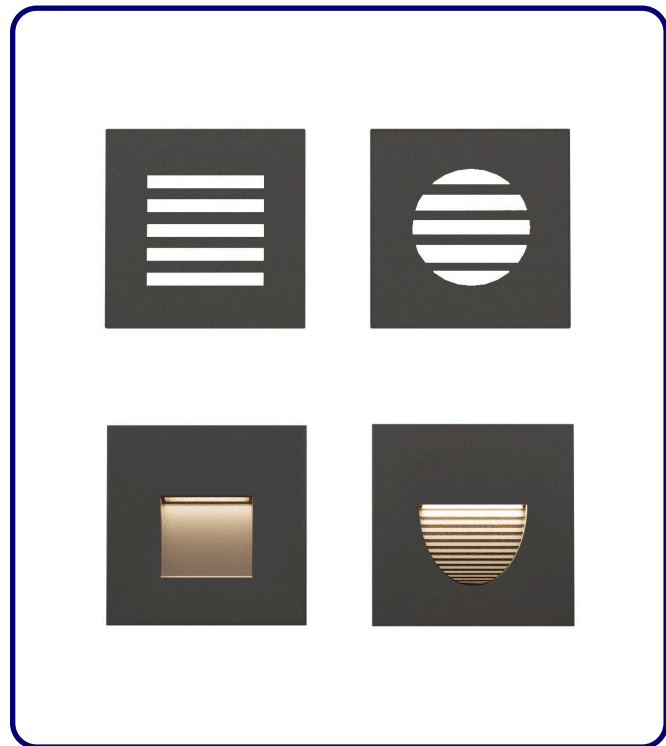

HOW TO ORDER:

CODE:

Example:

CODE: BO-BLZ-KPG-RWL-XXX-XXX-XXX-XXX-XXX-XX

BO-BLZ-KPG-RWL-
D1HC1634-K30-
KAP7037-DIM

2

CCT OPTIONS:

- K30 3000K
- CUS Custom on request*

3

FINISH OPTIONS:

- KAP7037 Sanded Dark Gray
- RAL 9005 Sanded Black
- RAL9003 Sanded White


4

DIMMING OPTIONS:

- DIM 1-10V
- PWM Pulse Width Modulation
- DALI DALI (Digital Addressable Lighting Interface)

5

RECESSED SLEEVE: (included)

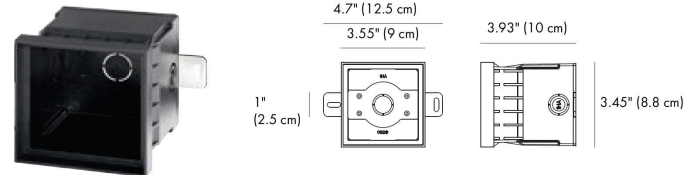

6

FEATURES:



- Front cover without screws



- Use the high-strength clips for fixation. (please refer remark 1)

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr


Richland, MI 49083

USA

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:

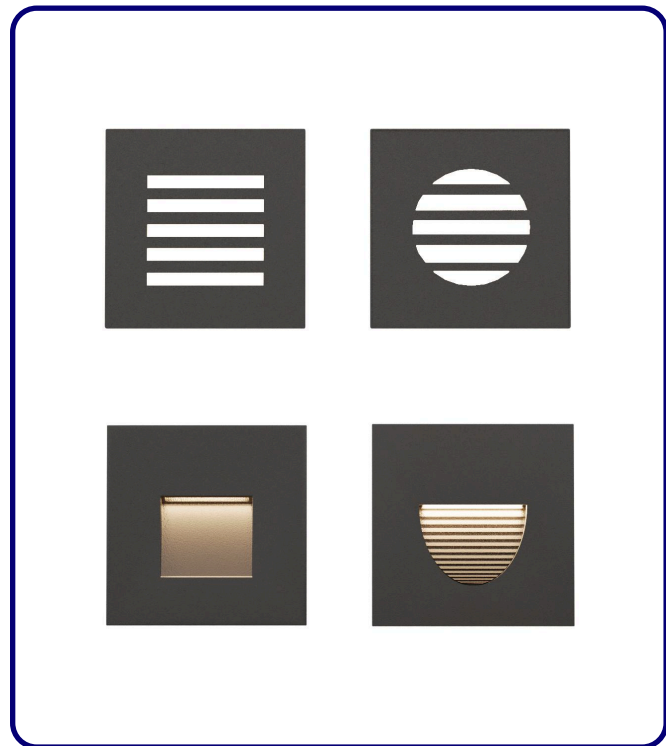

HOW TO ORDER:

CODE:


Example:

CODE: BO-BLZ-KPG-RWL-XXX-XXX-XXX-XXX-XXX-XX

BO-BLZ-KPG-RWL-
D1HC1634-K30-
KAP7037-DIM


7

DIAGRAM OF INSTRUCTION:

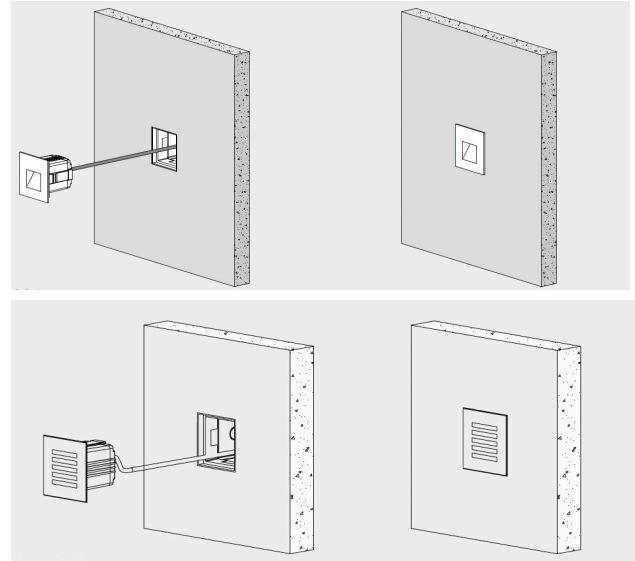

8

PHOTOMETRIC INFO:

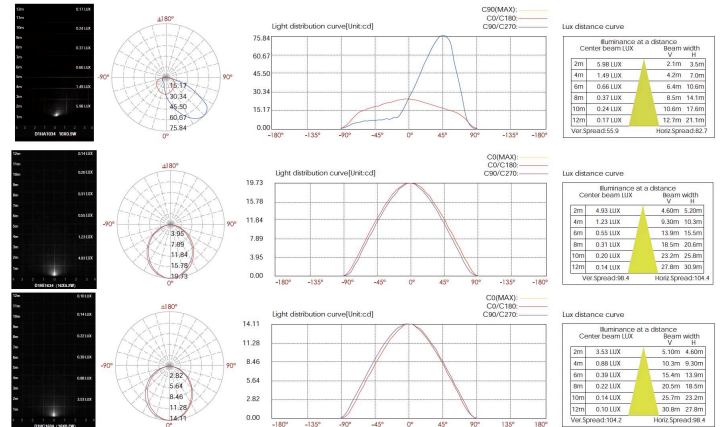

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA