


**FLUSH**  
**Recessed Wall Luminaires**  
**Round And Square Wall Luminaires**



FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_

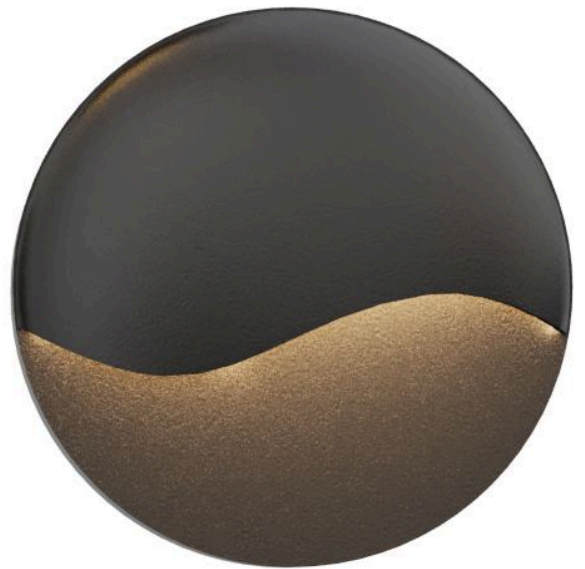

\*CABLE GLAND - IP66

#### GENERAL INFORMATION:

The FLUSH Recessed Wall Luminaire by Bullard Outdoor is a sleek and durable LED fixture designed for round and square wall applications. Made from die-cast dark gray powder-coated aluminum, it delivers efficient 110–277V illumination through a UV-stable, fireproof PC lens (T=2.5mm). With a load capacity over 2000 kg and IP65/IK08 protection, it ensures long-lasting performance in both residential and commercial settings. Featuring an IP66 cable gland for added durability, FLUSH is available in Sanded Dark Gray, Sanded Black, and Sanded White finishes, blending modern design with reliable functionality for architectural lighting.

#### FIXTURE TYPE:

Recessed Wall Luminaires - Round and Square Wall Luminaires

#### LIGHTING:

LED

LED

#### VOLTAGE:

110-277V

110-277V

#### MATERIAL:

12# Die-casting dark grey powder coated aluminum

#### LENS:

UVstop & Fireproof PC T=2.5mm

#### RECESSED SLEEVE:

PC/ABS ALLOYS 140#

#### LOADING CAPACITY:

>2000kg

#### IP RATING:

IP 65

IP65

#### IK RATING:

IK 08

#### FINISHING:

Sanded Dark Gray  
Sanded Black  
Sanded White

sales@gordonbullard.com  
www.bullardoutdoor.com  
1-877-964-4646



991 South Gull Lake Dr  
Richland, MI 49083  
USA

FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_

NOTES:

## HOW TO ORDER:

CODE:

Example:

CODE: BO-FLH-KPG-RWL-XXX-XXX-XXX-XXX-XXX-XX

BO-FLH-KPG-RWL-  
D1AL2832-K30-  
KAP7037-DIM

1

### MODELS:

CODE -D1AL2832

#### DIMENSIONS:

Diameter - Ø: 4.7" (12 cm)

Depth - P: 1.61" (4.1 cm)

#### LIGHT SOURCE:

LED / 28 x 0.1W / 15 mA / 18 lm / 110-277V / CRI 80

CODE -D1AK1833

#### DIMENSIONS:

Diameter - Ø: 4.7" (12 cm)

Depth - P: 2.5" (6.3 cm)

#### LIGHT SOURCE:

LED / 18 x 0.15W / 52 mA / 157 lm / 110-277V / CRI 80

CODE -D1AJ0634

#### DIMENSIONS:

Diameter - Ø: 4.7" (12 cm)

Depth - P: 2" (5 cm)

#### LIGHT SOURCE:

LED / 6 x 0.5W / 48 mA / 48 lm / 110-277V / CRI 80

2

### CCT OPTIONS:

-K30 3000K

-CUS Custom on request\*

3

### FINISH OPTIONS:

-KAP7037 Sanded Dark Gray

-RAL 9005 Sanded Black

-RAL9003 Sanded White

4

### DIMMING OPTIONS:

-DIM 1-10V



-PWM Pulse Width Modulation

-DALI DALI (Digital Addressable Lighting Interface)

-D1AL2832

Ø: 4.7" (12 cm)



1.61" (4.1 cm)



-D1AK1833

Ø: 4.7" (12 cm)



2.5" (6.3 cm)



-D1AJ0634

Ø: 4.7" (12 cm)

2" (5 cm)



sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_

NOTES:



\*CABLE GLAND - IP66

## HOW TO ORDER:

**CODE:**


Example:

CODE: BO-FLH-KPG-RWL-XXX-XXX-XXX-XXX-XXX-XX

BO-FLH-KPG-RWL-  
D1AL2832-K30-  
KAP7037-DIM

5

RECESSED SLEEVE: (included)

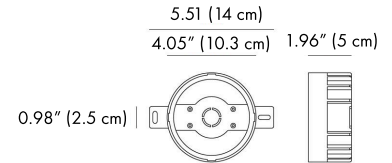


6

FEATURES:




Front cover without screws



Use the high-strength clips for installation and fixation. (please refer remark 1 & 2)


7

DIAGRAM OF INSTRUCTION:

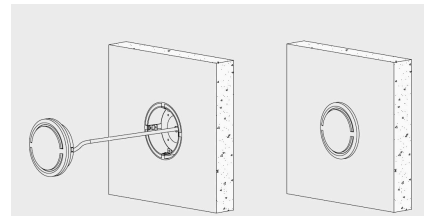

8

PHOTOMETRIC INFO:

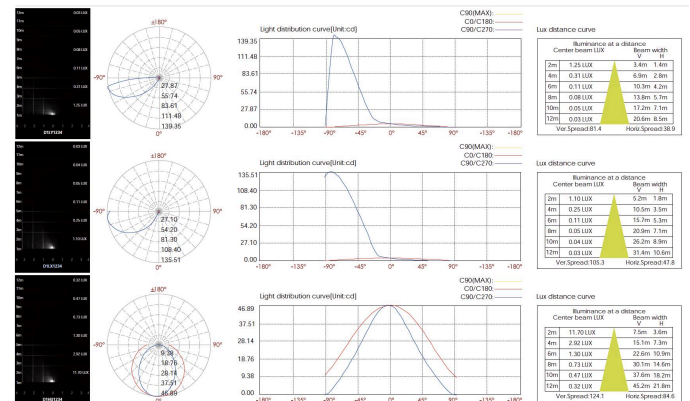

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA