


**GLOW**  
**Recessed Wall Luminaires**  
**Round And Square Wall Luminaires**



FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_

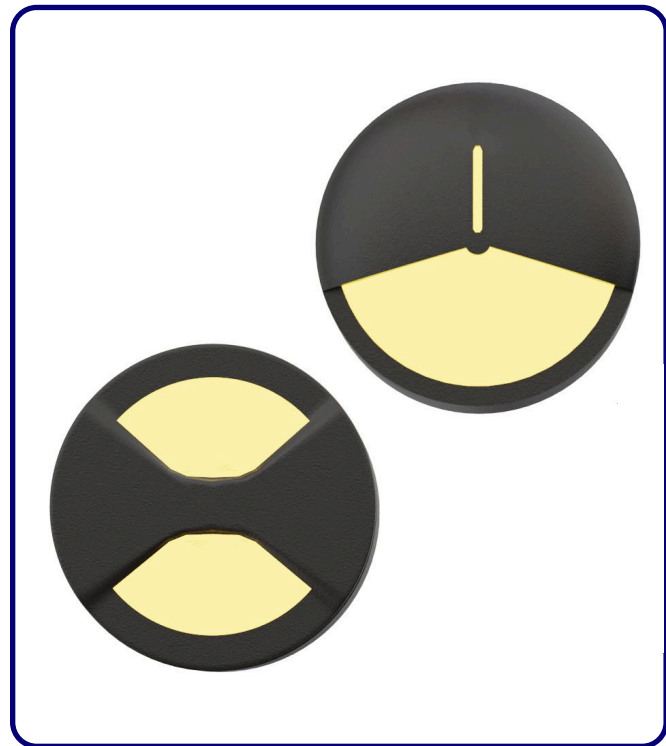

### GENERAL INFORMATION:

The GLOW Recessed Wall Luminaire by Bullard Outdoor is a versatile and durable lighting fixture designed for both round and square wall installations in pathways, stairs, and architectural spaces. Constructed from 12R die-cast dark gray powder-coated aluminum, it combines strength with a refined modern design. The fixture features a UV-stable and fireproof PC lens (T=2.5mm) that ensures reliable light diffusion and long-term performance. Operating on 110–277V with energy-efficient LED technology, it delivers consistent illumination with a CRI of 80, ideal for enhancing visibility and ambiance. Rated IP65 and IK09, GLOW offers excellent resistance to water, dust, and impact, making it perfect for outdoor or demanding environments. Available in Sanded Dark Gray, Sanded Black, and Sanded White finishes, it brings both style and durability to contemporary architectural lighting.

### FIXTURE TYPE:

Recessed Wall Luminaires - Round and Square Wall Luminaires

### LIGHTING:

LED

LED

### VOLTAGE:

110-277V



### MATERIAL:

12# Die-casting dark grey powder coated aluminum

### LENS:

UVstop & Fireproof PC T=2.5mm

### CRI:

80

### IP RATING:

IP 65

IP65

### IK RATING:

IK 09

### FINISHING:

Sanded Dark Gray

Sanded Black

Sanded White

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_

NOTES:

## HOW TO ORDER:

CODE:

Example:

CODE: BO-GL-KPG-RWL-XXX-XXX-XXX-XXX-XXX-XX

BO-GL-KPG-RWL-  
D1KT3032-K30-  
KAP7037-DIM

1

### MODELS:

CODE -D1KT3032

#### DIMENSIONS:

Diameter - Ø: 6.3" (16 cm)

Width - W: 2" (5 cm)

#### LIGHT SOURCE:

LED / 30 x 0.07W / 14 mA / 118 lm / 110-277V

CODE -D1KW3032

#### DIMENSIONS:

Diameter - Ø: 6.3" (16 cm)

Width - W: 2" (5 cm)

#### LIGHT SOURCE:

LED / 30 x 0.07W / 14 mA / 142 lm / 110-277V

2

### CCT OPTIONS:

-K30 3000K

-CUS Custom on request\*

3

### FINISH OPTIONS:

-KAP7037 Sanded Dark Gray

-RAL 9005 Sanded Black

-RAL9003 Sanded White

4

### DIMMING OPTIONS:


-DIM 1-10V

-PWM Pulse Width Modulation

-DALI DALI (Digital Addressable Lighting Interface)

5


### DIAGRAM OF INSTRUCTION:

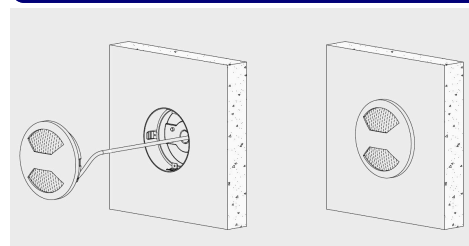

-D1KT3032

Ø: 6.3" (16 cm)



2" (5 cm)



-D1KW3032

Ø: 6.3" (16 cm)

2" (5 cm)



**LED**

110-  
277V



**IP65**

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr


Richland, MI 49083

USA

FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_

NOTES:

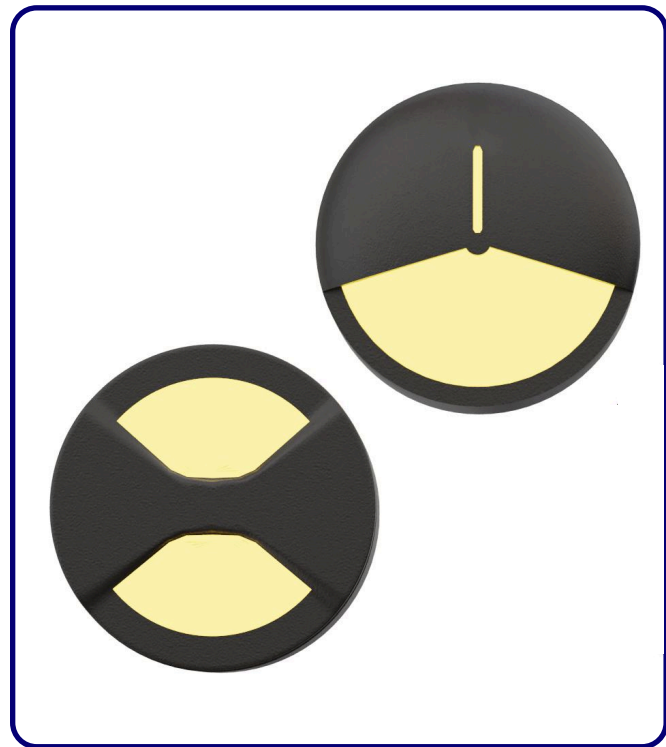

## HOW TO ORDER:

## CODE:

Example:

CODE: BO-GL-KPG-RWL-XXX-XXX-XXX-XXX-XXX-XX


BO-GL-KPG-RWL-  
D1KT3032-K30-  
KAP7037-DIM

6

RECESSED SLEEVE: (included)



148#




7

FEATURES:




Front cover without screws



Use the high-strength clips for installation and ixation. (please refer remark 1 & 2)

8

PHOTOMETRIC INFO:

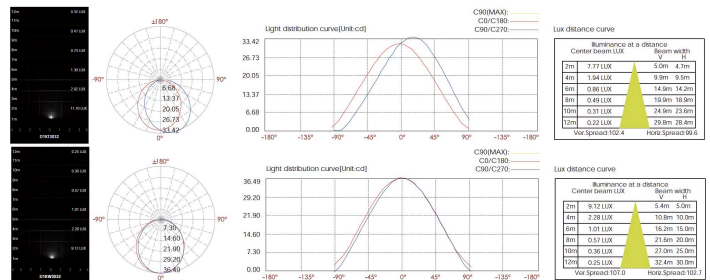

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA