

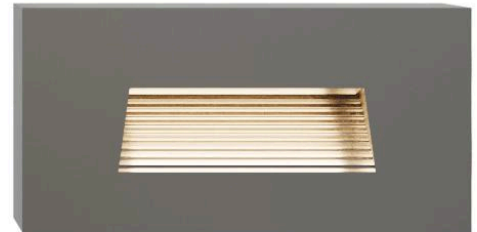


LITZY
Recessed Wall Luminaires
Stair / Pathway Luminaires

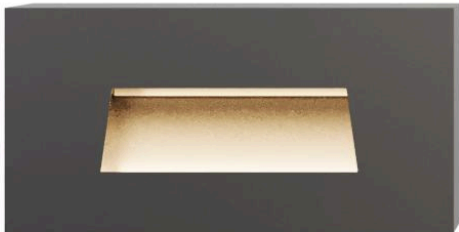

FIXTURE TYPE: _____

PROJECT NAME: _____

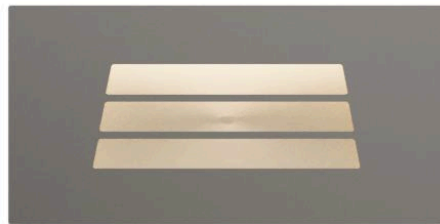

*CABLE GLAND - IP67 PG-9 PA66

GENERAL INFORMATION:

The LITZY Recessed Wall Luminaire by Bullard Outdoor is a durable LED fixture for stair and pathway lighting. Made from die-cast dark gray powder-coated aluminum with a UV-stable, fireproof lens, it operates on 110–277V and offers IP65 and IK10 protection. With an IP67 cable gland for added durability, LITZY delivers reliable performance in Sanded Dark Gray, Sanded Black, or Sanded White finishes.

FIXTURE TYPE:

Recessed Wall Luminaires - Stair/Pathway Luminaires

LIGHTING:

LED

LED

VOLTAGE:

110-277V



MATERIAL:

12# Die-casting dark gray powder coated aluminum

COVER:

D1CG0734, D1CA0734: 12# Die-casting aluminum

D1CC1834: Made by hard chrome-plated stainless steel 316L#

LENS:

UVstop & Fireproof PC

RECESSED SLEEVE:

PC/ABS ALLOYS 090#

IP RATING:

IP 65

IP65

IK RATING:

IK 10

FINISHING:

Sanded Dark Gray

Sanded Black

Sanded White

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:

HOW TO ORDER:

CODE:

Example:

CODE: BO-LTZ-KPG-RWL-XXX-XXX-XXX-XXX-XXX-XX

BO-LTZ-KPG-RWL-
D1CG0734-K30-
KAP7037-DIM

1

MODELS:

CODE -D1CG0734

DIMENSIONS:

Length - L: 6.3" (16 cm)
Height - H: 3.15" (8 cm)
Depth - P: 2.44" (6.2 cm)

LIGHT SOURCE:

LED / 7 x 0.5W / 37 mA / 137 lm / 110-277V / CRI 80

CODE -D1CA0734

DIMENSIONS:

Length - L: 6.3" (16 cm)
Height - H: 3.15" (8 cm)
Depth - P: 2.44" (6.2 cm)

LIGHT SOURCE:

LED / 7 x 0.5W / 37 mA / 131 lm / 110-277V / CRI 80

CODE -D1CC1834

DIMENSIONS:

Length - L: 6.3" (16 cm)
Height - H: 3.15" (8 cm)
Depth - P: 2.44" (6.2 cm)

LIGHT SOURCE:

LED / 18 x 0.2W / 31 mA / 56 lm / 110-277V / CRI 80

2

CCT OPTIONS:


-K30 3000K
-CUS Custom on request*

3


FINISH OPTIONS:

-KAP7037 Sanded Dark Gray
-RAL 9005 Sanded Black
-RAL9003 Sanded White


-D1CG0734

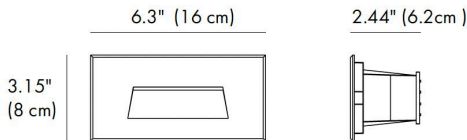

-D1CA0734

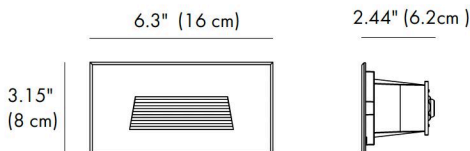

-D1CC1834

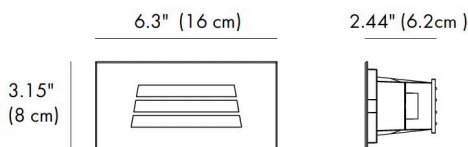

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:



*CABLE GLAND - IP67 PG-9 PA66

HOW TO ORDER:

CODE:

Example:
CODE: BO-LTZ-KPG-RWL-XXX-XXX-XXX-XXX-XXX-XX

BO-LTZ-KPG-RWL-
D1CG0734-K30-
KAP7037-DIM

4

DIMMING OPTIONS:

- DIM 1-10V
- PWM Pulse Width Modulation
- DALI DALI (Digital Addressable Lighting Interface)

5

FEATURES:




• Front cover without screws



• Use the high-strength clips for fixation, (please refer remark 1 & 2)


6

RECESSED SLEEVE: (included)




7

DIAGRAM OF INSTRUCTION:

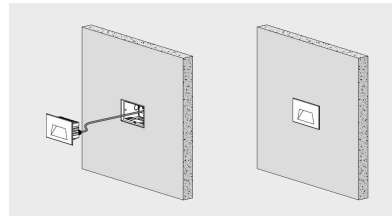

8

PHOTOMETRIC INFO:

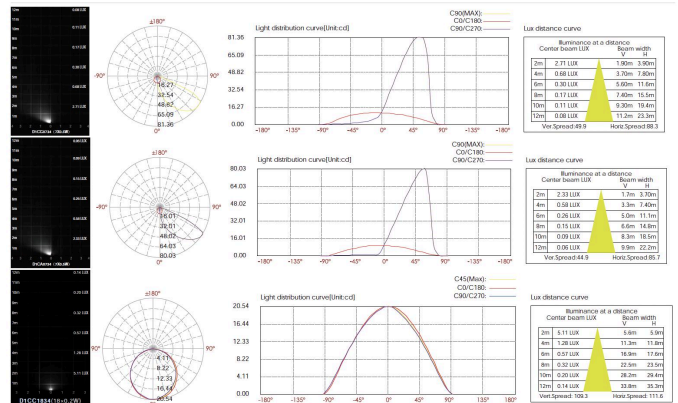

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA