

LUMEXTRA
Recessed Wall Luminaires
Stair / Pathway Luminaires



FIXTURE TYPE: _____

PROJECT NAME: _____



*CABLE GLAND - IP67 copper and nicked coated

GENERAL INFORMATION:

The LUMEXTRA Recessed Wall Luminaire by Bullard Outdoor is a durable LED fixture for stairways and pathways. Made from die-cast dark gray powder-coated aluminum with a tempered glass lens, it operates on 110–277V and offers IP67 and IK10 protection. With a load capacity over 2000 kg, LUMEXTRA ensures reliable, long-lasting performance in Sanded Dark Gray, Sanded Black, or Sanded White finishes.

FIXTURE TYPE:

Recessed Wall Luminaires - Stair/Pathway Luminaires

LIGHTING:

LED

LED

VOLTAGE:

110-277V

110-277V

MATERIAL:

12# Die-casting dark grey powder coated aluminum

LENS:

B1XQ0156: Step tempered clear glass.T=4mm

B1XT0157, R1XU0125: Step tempered clear glass.T=8mm

RECESSED SLEEVE:

B1XQ0156: PC/ABS ALLOYS 182#

B1XT0157: PC/ABS ALLOYS 185#

R1XU0125: PC/ABS ALLOYS 184#

LOADING CAPACITY:

>2000kg

IP RATING:

IP 67

IP67

IK RATING:

IK 10

FINISHING:

Sanded Dark Gray

Sanded Black

Sanded White

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

FIXTURE TYPE: _____



PROJECT NAME: _____

NOTES:

-B1XQ0156

Ø: 1.65" (4.2 cm)

1.7" (4.4 cm)





1.5"
(3.8 cm)

-B1XT0157

Ø: 2.36 (6 cm)

2" (5.3 cm)





1.7"
(4.4 cm)

-R1XU0125

Ø: 2.75" (7 cm)

4.3" (11 cm)



2"
(5.2 cm)

HOW TO ORDER:

CODE:

Example:

CODE: BO-LMX-KPG-RWL-XXX-XXX-XXX-XXX-XXX-XX

BO-LMX-KPG-RWL-
B1XQ0156-K30-
KAP7037-DIM-B44-20

1

MODELS:

CODE -B1XQ0156

DIMENSIONS:

Diameter - Ø: 1.65" (4.2 cm)

Depth - P: 2" (5 cm)

LIGHT SOURCE:

LED / 1 x 1W / 54 mA / 23 lm / 110-277V / CRI 80

CODE -B1XT0157

DIMENSIONS:

Diameter - Ø: 2.36" (6 cm)

Depth - P: 2" (5.3 cm)

LIGHT SOURCE:

LED / 1 x 2W / 108 mA / 51 lm / 110-277V / CRI 80

CODE -R1XU0125

DIMENSIONS:

Diameter - Ø: 2.75" (7 cm)

Depth - P: 4.3" (11 cm)

LIGHT SOURCE:

LED / 1 x 5W / 52 mA / 208 lm / 110-277V / CRI 80

2

CCT OPTIONS:

-K30 3000K

-CUS Custom on request*

3

FINISH OPTIONS:

-KAP7037 Sanded Dark Gray

-RAL 9005 Sanded Black

-RAL9003 Sanded White

4

DIMMING OPTIONS:

-DIM 1-10V

-PWM Pulse Width Modulation

-DALI DALI (Digital Addressable Lighting Interface)

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr


Richland, MI 49083

USA

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:

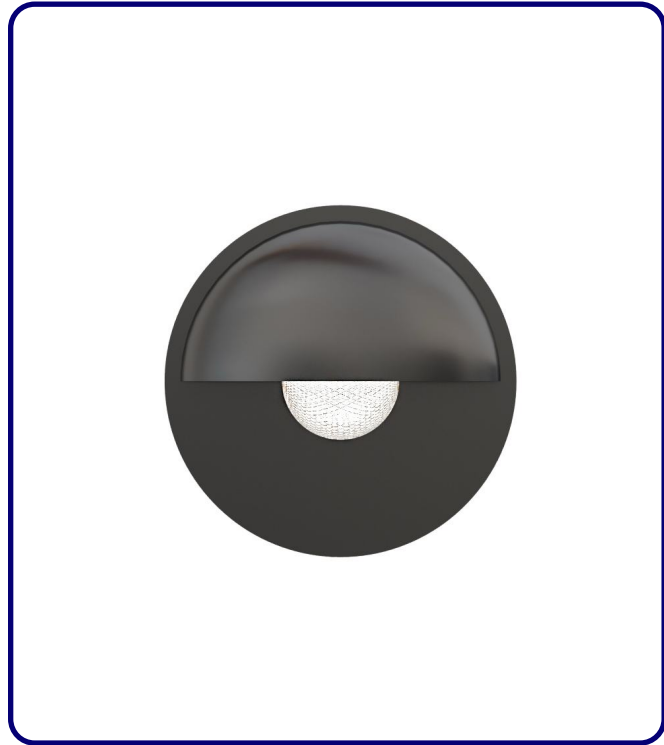

*CABLE GLAND - IP67 copper and nicked coated

HOW TO ORDER:

CODE:

Example:

CODE: BO-VRT-KPG-RWL-XXX-XXX-XXX-XXX-XXX-XX

BO-LMX-KPG-RWL-
B1XQ0156-K30-
KAP7037-DIM-B44-20

5

MOUNTING SLEEVE CHARACTERISTIC:

available only for
-B1XQ0156 model

-B44-20 20°

available only for
-B1XT0157 model

-B34D-30 30°

available only for
-R1XU0125 model


-R7-18 18°

-R7-24 24°

-R7-32 32°

6


RECESSED SLEEVE: (included)



BO-B1XQ0156-WL
182#




BO-B1XT0157-WL
185#



BO-R1XU0125-WL
184#


7

DIAGRAM OF INSTRUCTION:

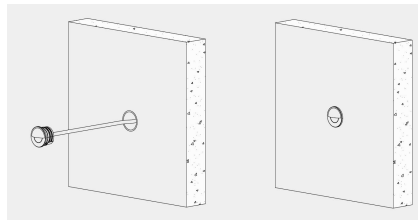

8

PHOTOMETRIC INFO:

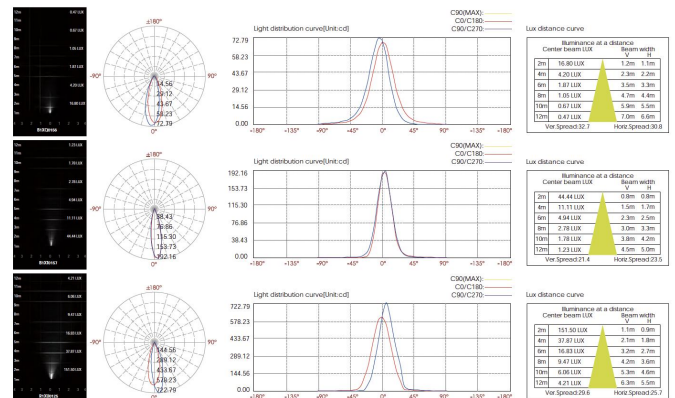

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA