

LUMO
Recessed Wall Luminaires
Stair/Pathway Luminaires



FIXTURE TYPE: _____

PROJECT NAME: _____



GENERAL INFORMATION:

The LUMO Recessed Wall Luminaire by Bullard Outdoor is a durable and elegant lighting solution designed for stairways, pathways, and architectural applications. Crafted from 1/2 die-cast RA19005 powder-coated aluminum with a molding-shaped stainless steel SUS 316 front cover, it combines strength with refined aesthetics. Operating on 110–277V with LED technology, it delivers efficient, high-quality illumination with a CRI of 80. Engineered for performance in harsh environments, it features an IP65 weatherproof and IK10 impact-resistant rating. LUMO offers versatile, stylish illumination ideal for both residential and commercial spaces.

FIXTURE TYPE:

Recessed Wall Luminaires - Stair/Pathway Luminaires

LIGHTING:

LED

LED

VOLTAGE:

110-277V

110-277V

MATERIAL:

HOUSING - 12# Die-casting RAL9005 powder coated aluminum
FRONT COVER - Molding shaped stainless-steel SUS 316

CRI:

80

IP RATING:

IP 65

IP65

IK RATING:

IK 10

sales@gordonbullard.com
www.bullardoutdoor.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:

HOW TO ORDER:

CODE:

Example:

CODE: BO-LM-KPG-RWL-XXX-XXX-XXX-XXX-XXX-XXX

BO-LM-KPG-RWL-B1TR0157-
K30-B91-50-DIM-

1

MODELS:

CODE -B1TR0157

DIMENSIONS:

Diameter - Ø: 3.15" (8 cm)

Height - H: 2.75" (7 cm)

LIGHT SOURCE:

LED / 1 x 2W / 50 mA / 186 lm / 110-277V

CODE -B1AAR0102

DIMENSIONS:

Diameter - Ø: 2.15" (5.5 cm)

Height - H: 2.55" (6.5 cm)

LIGHT SOURCE:

LED / 1 x 2W / 100 mA / 52 lm / 110-277V

2

CCT OPTIONS:

-K30 3000K

-CUS Custom on request*

3

BEAM ANGLE:

-B91-50 50° for -B1TR0157 model

-B60-50 50° for -B1AAR0102 model

4

DIMMING OPTIONS:


-DIM 1-10V

-PWM Pulse Width Modulation

-DALI DALI (Digital Addressable Lighting Interface)

5



DIAGRAM OF INSTRUCTION:

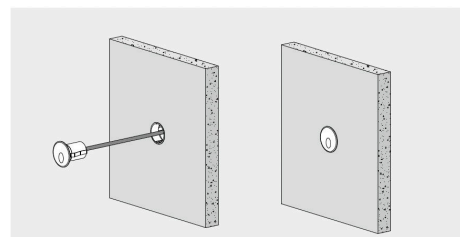

-B1TR0157

Ø: 3.15" (8 cm)



2.75" (7 cm)



-B1AAR0102

Ø: 2.15" (5.5 cm)

2.55" (6.5 cm)



LED

110-
277V



IP65

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:



HOW TO ORDER:

CODE:



Example:

CODE: BO-LM-KPG-RWL-XXX-XXX-XXX-XXX-XXX-XXX

BO-LM-KPG-RWL-B1TR0157-
K30-B91-50-DIM-

6

RECESSED SLEEVE: (included)

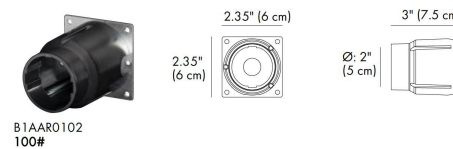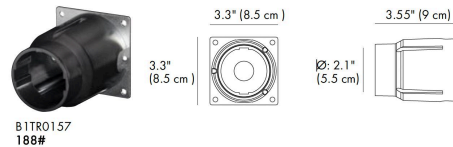


7

FEATURES:



8

PHOTOMETRIC INFO:

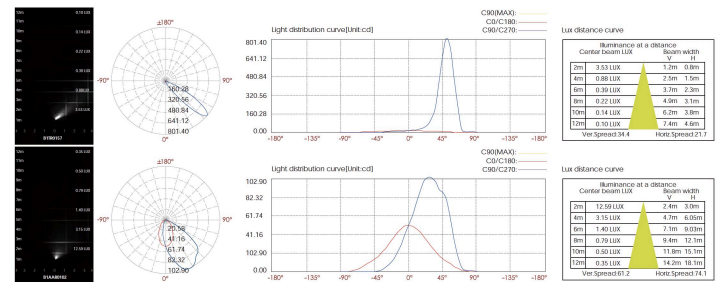

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA