

TITAWIN Spotlight - High Power Spotlight









PROJECT NAME:	

GENERAL INFORMATION:

The TITAWIN High Power LED Spotlight by Bullard Outdoor is a durable, high-performance outdoor fixture made from die-cast aluminum with a tempered glass lens. Operating on 110-277V with IP66 and IK07 ratings, it ensures powerful, reliable illumination in any environment and is available in multiple sanded finishes for versatile design applications.

FIXTURE TYPE:

Spotlight - High power spotlight

LIGHTING

LED

VOLTAGE:

110-277V

MATERIAL:

12# Die-casting aluminum finishing

LENS:

Tempered glass.T=3mm

CRI:

80

IP RATING:

IP 66

IP66

LED

IK RATING:

IK 07

FINISHING:

Sanded Bronze Sanded Dark Gray

Sanded Black

Sanded White

CABLE GLAND:

IP68 PG-11 PA66


sales@gordonbullard.com www.bullardoutdoor.com 1-877-964-4646



991 South Gull Lake Dr Richland, MI 49083 USA



FIXTURE TYPE:		
PROJECT NAME: _		
notes:		
		J

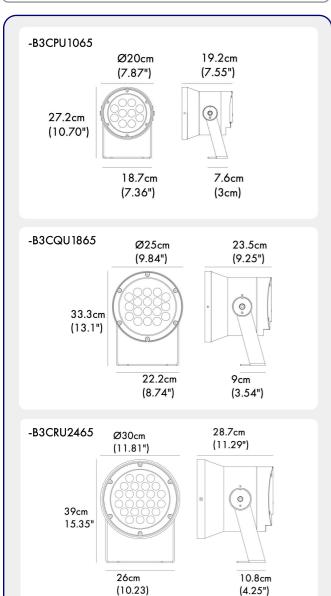









sales@gordonbullard.com www.bullardoutdoor.com 1-877-964-4646



CODE:

Example:

CODE: BO-TWN-KPG-SPT-XXX-XXX-XXX-XXX

BO-TWN-KPG-SPT-B3CPU1065-K30-KAP7008-B92-8-B-CA3042-CA3045

MODELS:

CODE -B3CPU1065

DIMENSIONS:

Ø: 7.87" (20 cm) Diameter -H: 10.70" (27.2 cm) Height -L: 7.55" (19.2 cm) Length -

LIGHT SOURCE:

LED / 10 x 4.5W / 214 mA / 4210 lm / 110-277V

CODE -B3CQU1865

DIMENSIONS:

Ø: 9.84" (25 cm) Diameter -H: 13.1" (33.3 cm) Height -L: 9.25" (23.5 cm) Length -

LIGHT SOURCE:

LED / 18 x 4.5W / 385 mA / 7771 lm / 110-277V

CODE -B3CRU2465

DIMENSIONS:

Ø: 11.8" (30 cm) Diameter -H: 15.35" (39 cm) Height -L: 11.29" (28.7 cm) Length -

LIGHT SOURCE:

LED / 24 x 4.5W / 570 mA / 11,234 lm / 110-277V

CCT OPTIONS:

-K30 3000K

-CUS Custom on request*

3 FINISH OPTIONS:

> -KAP7008 Sanded Bronze -KAP7037 Sanded Dark Gray -RAL 9005 Sanded Black

-RAL9003 Sanded White



2

991 South Gull Lake Dr Richland, MI 49083

USA



FIXTURE TYPE:		
PROJECT NAME:	HOW TO ORDER:	CODE:
NOTES:	Example: CODE: BO-TWN-KPG-SPT-XXX-XXX-XXX	BO-TWN-KPG-SPT- B3CPU1065-K30-KAP7008- B92-8-B-CA3042-CA3045
	BEAM ANGLE:	
	which is also an important system for -B B IP67 Jiffy quick plug/socket connect	e end of luminaires as standard assembly water resistance.
	6 ACCESSORIES:	
LED (110) IP66	-CA3042 -B3CPU1065	
	-CA3045 -B3CPU1065 (1) -CA3046 -B3CQU1865 (1) -CA3047 -B3CRU2465 (1)	

sales@gordonbullard.com www.bullardoutdoor.com 1-877-964-4646



991 South Gull Lake Dr Richland, MI 49083 USA



PROJECT NAME:		
NOTES:		
		I




HOW TO ORDER: CODE:

Example:

CODE: BO-TWN-KPG-SPT-XXX-XXX-XXXX

BO-TWN-KPG-SPT-B3CPU1065-K30-KAP7008-B92-8-B-CA3042-CA3045

PHOTOMATRIC INFO:

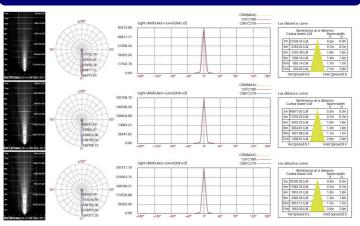

LED







sales@gordonbullard.com www.bullardoutdoor.com 1-877-964-4646



991 South Gull Lake Dr Richland, MI 49083 USA