


VERTA
Recessed Wall Luminaires
Stair / Pathway Luminaires



FIXTURE TYPE: _____

PROJECT NAME: _____

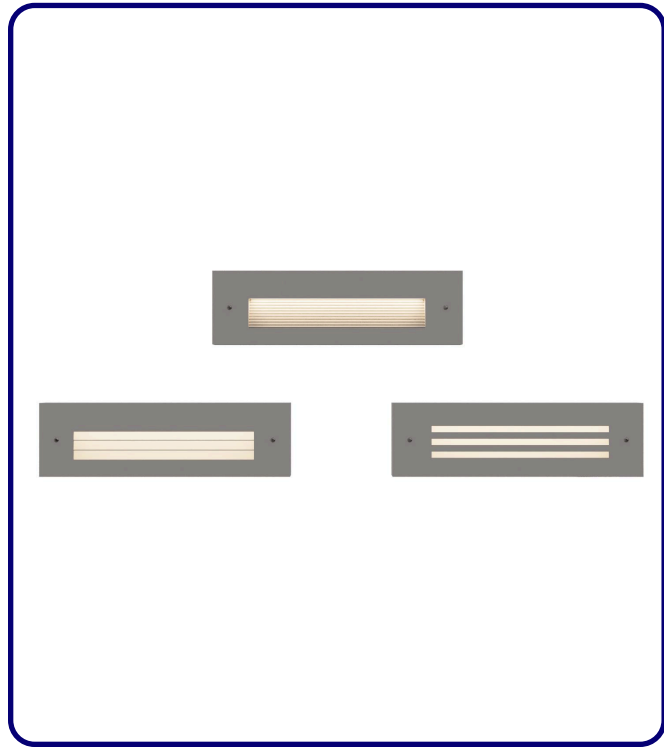

*CABLE GLAND - IP68 PG-9 PA66

GENERAL INFORMATION:

The VERTA Recessed Wall Luminaire by Bullard Outdoor is a durable LED fixture for stairways and pathways. Made from die-cast dark gray powder-coated aluminum with optional stainless steel covers, it features a UV-stable, fireproof lens for reliable performance. Operating on 110–277V with a CRI of 80, VERTA is IP65 and IK09 rated, ensuring durability and style in Sanded Dark Gray, Sanded Black, or Sanded White finishes.

FIXTURE TYPE:

Recessed Wall Luminaires - Stair/Pathway Luminaires

LIGHTING:

LED

LED

VOLTAGE:

110-277V



MATERIAL:

12# Die-casting dark grey powder coated aluminum

COVER:

D1BA1517A, D1BB4232: 12# Die-casting aluminum

D1BC4232: Made by hard chrome-plated stainless steel 316L#

LENS:

D1BC4232, D1BB4232: UVstop & Fireproof PC T=3mm:

D1BA1517A: UVstop & Fireproof PC T=1.5mm:

RECESSED SLEEVE:

PC/ABS ALLOYS 074#

IP RATING:

IP 65

IP65

IK RATING:

IK 10

FINISHING:

Sanded Dark Gray

Sanded Black

Sanded White

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:

HOW TO ORDER:

CODE:

Example:

CODE: BO-VRT-KPG-RWL-XXX-XXX-XXX-XXX-XXX-XX

BO-VRT-KPG-RWL-
D1BA1517A-K30-
KAP7037-DIM

1

MODELS:

CODE -D1BA1517A

DIMENSIONS:

Length - L: 10" (25.5 cm)

Height - H: 3" (7.5 cm)

Depth - P: 2.75" (7 cm)

LIGHT SOURCE:

LED / 15 x 0.2W / 29 mA / 104 lm / 110-277V / CRI 80

CODE -D1BB4232

DIMENSIONS:

Length - L: 10" (25.5 cm)

Height - H: 3" (7.5 cm)

Depth - P: 2.75" (7 cm)

LIGHT SOURCE:

LED / 42 x 0.09W / 30 mA / 44 lm / 110-277V / CRI 80

CODE -D1BC4232

DIMENSIONS:

Length - L: 10" (25.5 cm)

Height - H: 3" (7.5 cm)

Depth - P: 2.75" (7 cm)

LIGHT SOURCE:

LED / 42 x 0.09W / 30 mA / 130 lm / 110-277V / CRI 80

2

CCT OPTIONS:

-K30 3000K

-CUS Custom on request*

3


FINISH OPTIONS:

-KAP7037 Sanded Dark Gray


-RAL 9005 Sanded Black

-RAL9003 Sanded White


-D1BA1517A

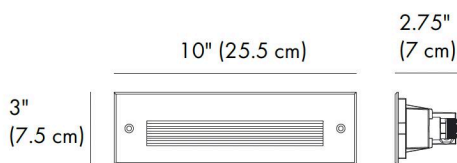

-D1BB4232

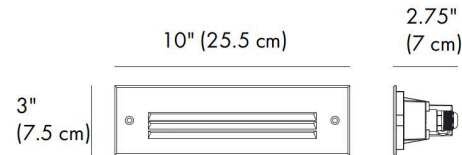

-D1BC4232

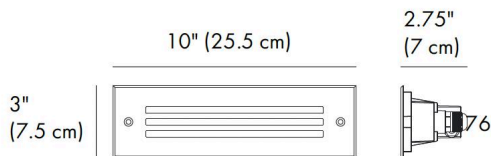

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr


Richland, MI 49083

USA

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:

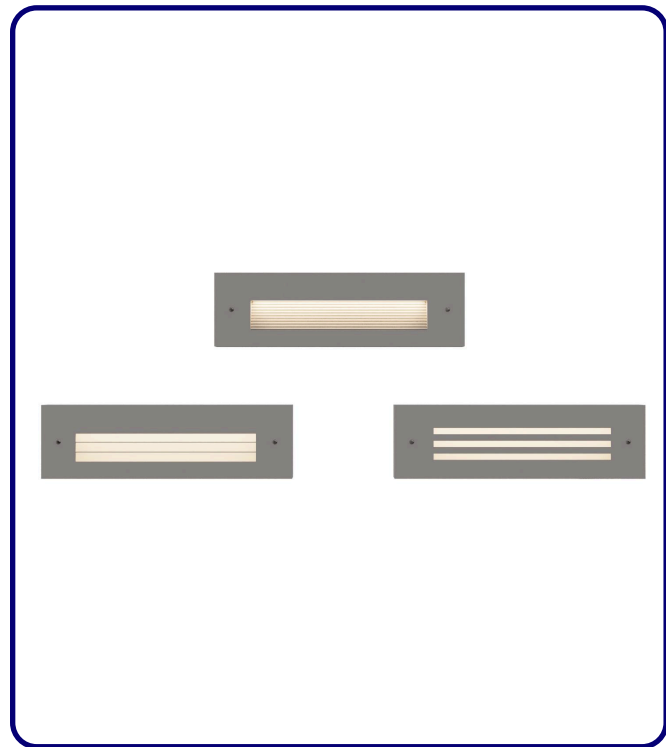

HOW TO ORDER:

CODE:

Example:

CODE: BO-VRT-KPG-RWL-XXX-XXX-XXX-XXX-XXX-XX

BO-VRT-KPG-RWL-
D1BA1517A-K30-
KAP7037-DIM

4

DIMMING OPTIONS:

- DIM 1-10V
- PWM Pulse Width Modulation
- DALI DALI (Digital Addressable Lighting Interface)

5


MOUNTING SLEEVE CHARACTERISTIC:



- The above picture – the supporting plate "A1" and "A2" are used for preventing deformation of the sleeve during the construction installation process.
- Please remove the supporting plate "A1" and "A2" from the mounting sleeve before the lamp installation.


6

RECESSED SLEEVE: (included)

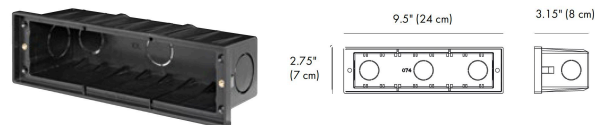


7

DIAGRAM OF INSTRUCTION:

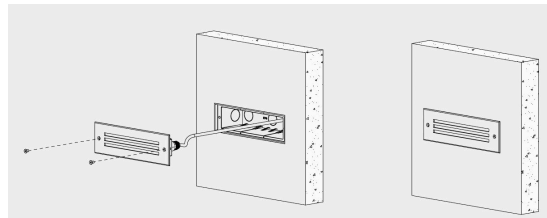

8

PHOTOMETRIC INFO:

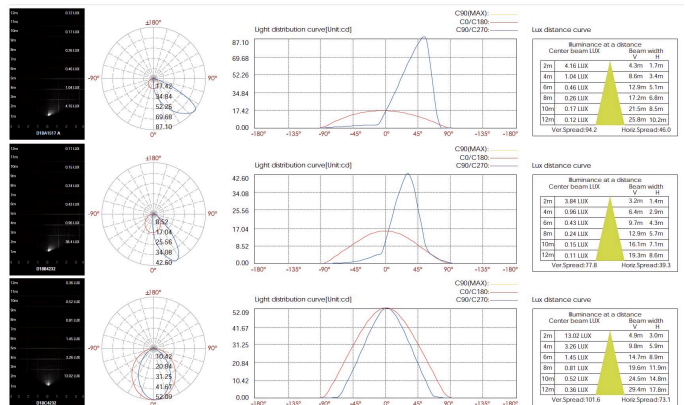

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA