








CODE: BO-1E2WP0157-IN



CODE: BO-2E2WP0157-IN



CODE: BO-4E2WP0157-IN



**LIGHT SOURCE:**

1 x 2W

**LENS:**

B73

**BEAM ANGLE:**

120°

**INPUT VOLTAGE:**

110-277V

**OPERATING CURRENT:**

28 mA

**CONSUMPTION:**

3W

**LUMINANCE:**

CW=15 | WW=13

**IK:**

10

**LIGHT SOURCE:**

1 x 2W

**LENS:**

B73

**BEAM ANGLE:**

100°

**INPUT VOLTAGE:**

110-277V

**OPERATING CURRENT:**

28 mA

**CONSUMPTION:**

3W

**LUMINANCE:**

CW=14 | WW=10

**IK:**

10

**LIGHT SOURCE:**

1 x 2W

**LENS:**

B73

**BEAM ANGLE:**

45°

**INPUT VOLTAGE:**

110-277V

**OPERATING CURRENT:**

28 mA

**CONSUMPTION:**

3W

**LUMINANCE:**

CW=12 | WW=8.5

**IK:**

10

**WATER PROOF SOLUTION**



**A Water-Stopper (Included)**  
A IP-67 water-stopper is added in the end of luminaires as standard assembly which is also an important system for water resistance.

**IP67 Jiffy quick plug/socket connector (Option)**  
A IP-67 connector is as an optional assembly and ensures that water vapor will not enter into luminaires directly.

IP67  
OUTDOOR  
RATED  
RoHS  
COMPLIANT

sales@gordonbullarda.com  
www.bullardoutdoor.com  
1-877-964-4646



991 South Gull Lake Dr  
Richland, MI 49083  
USA




<b>HOUSING</b>	6063# dark grey powder coated aluminum T=60-80µm. Adhesion of ISO class 1/ASTM class 4B
<b>FRONT COVER</b>	Hard chromeplated stainless steel SUS 316#
<b>LIGHT WINDOW</b>	UVstop & Fireproof PC
<b>GASKET</b>	Silicon rubber molding shaped seal
<b>OPERATING TEMPERATURE</b>	-20°C~40°C
<b>POWER CABLE</b>	Outside of luminaire 110-277V: H05RN-F 3x1.0mm <sup>2</sup> , L=0.5m
<b>LED TYPE</b>	OSRAM SMD3030
<b>CRI</b>	90
<b>CCT</b>	3000K / 3500K / 4000K / 5000K / Custom on request
<b>RECESSED SLEEVE MATERIAL</b>	PC/ABS ALLOYS
<b>GLASS PRESSURE CAPACITY</b>	2,000kgs
<b>DIMMING SUPPORT</b>	Triac PWM, 1-10V, Dali, Customized
<b>IP</b>	IP67


		Referenced Degree(°)θ1/2				
	B33	9°	15°	20°	45°	60°
	B73	30°				

### SLEEVE (Included)




Option 1

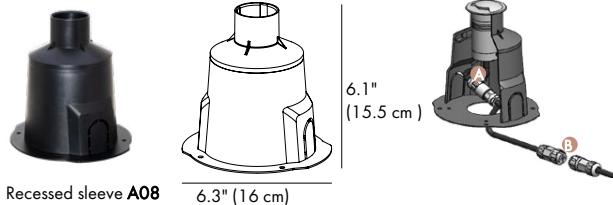

Option 2

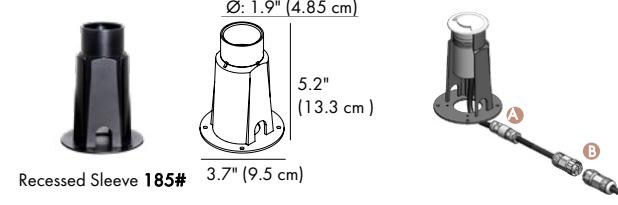

### PHOTOMETRIC

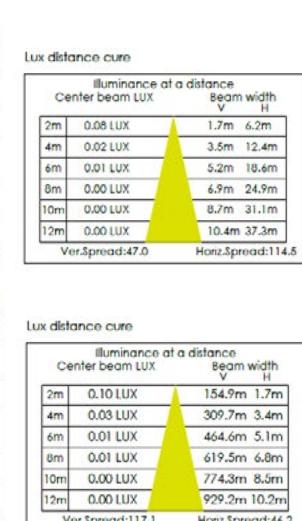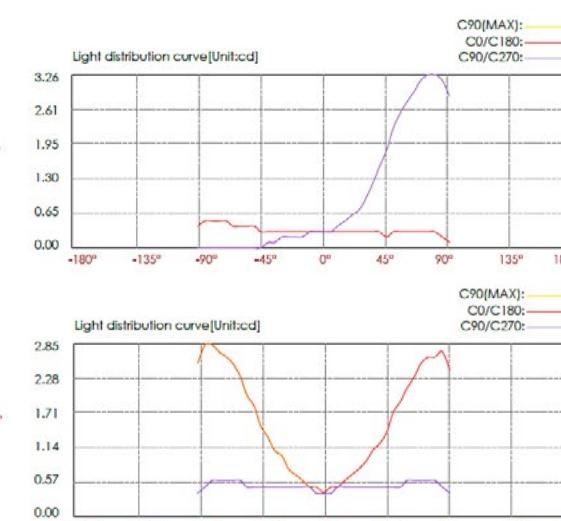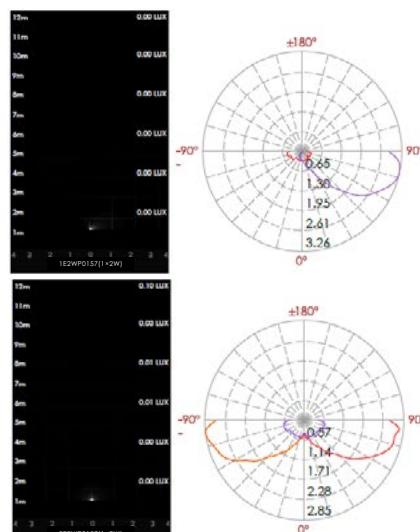



**BULLARD**  
**OUTDOOR**  
BUILT for the STORM

CODE: BO-1E2WP0157-IN



CODE: BO-2E2WP0157-IN



CODE: BO-4E2WP0157-IN



**KORI**

**CODE:**

**EXAMPLE:**

BO-1E2WP0157-IN-K30-DIM

BO-1E2WP0157-IN

## 1. CHOOSE FIXTURE MODEL:

BO-1E2WP0157-IN

BO-2E2WP0157-IN

BO-4E2WP0157-IN

## 2. CHOOSE CCT:

-K30	3000K
-K35	3500K
-K40	4000K
-K50	5000K
-CUS*	Custom on request

## 3. DIMMING OPTIONS:

PWM -	Triac PWM
DIM -	1-10V
DALI -	DALI
CUS* -	Custom on request