


CODE: BO-B2YCR0157-IN



Ø: 1.8" (4.5 cm)

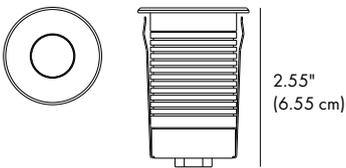

LIGHT SOURCE:

1 × 2W OSRAM

LENS:

B27

SELECTED DEGREE:

13°

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

110 mA

CONSUMPTION:

2.5W


LUMINANCE:

147 lm

CODE: BO-D2YCR0134-IN



Ø: 1.8" (4.5 cm)

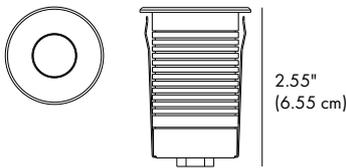

LIGHT SOURCE:

1 × 0.5W NICHIA

LENS:

B26

SELECTED DEGREE:

60°

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

26 mA

CONSUMPTION:

0.6W

LUMINANCE:

23 lm

WATER PROOF SOLUTION



A IP67 Jiffy quick plug/socket connector(Option)
A IP-67 connector is as an optional assembly and ensures that water vapor will not enter into luminaires directly.



sales@gordonbullarda.com
www.bullardoutdoor.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA

SLEEVE (Included)




LIGHTING INFORMATION

FRONT COVER	316# stainless steel forged molding with hard chrome plated
HOUSING	6063# grey powder coated aluminum T=60-80µm Adhesion of ISO class 1/ASTM class 4B
LIGHT WINDOW	Tempered step glass.T=4mm
GASKET	Silicon rubber molding shaped seal
POWER CABLE	Outside of luminaire : 110-277V: H05RN-F 2×1.0mm ² , L=0.5m
CABLE GLAND	IP67 Nickel coated copper
LED DRIVER	Constant Current Input
CCT	3000K / 3500K / 4000K / 5000K / Custom on request
CRI	90
LENS	PMMA
RECESSED SLEEVE MATERIAL	PC/ABS ALLOYS
GLASS PRESSURE CAPACITY	Full area=254kgs
DIMMING SUPPORT	Triac PWM, 1-10V,Dali ,Customized
IP	IP67
IK	03
OPERATING TEMPERATURE	-20 °C~40 °C

OPTICS		Referenced Degree(°)θ1/2		
	B27	13°	25°	30°
	B26	8°	13°	

PHOTOMETRIC

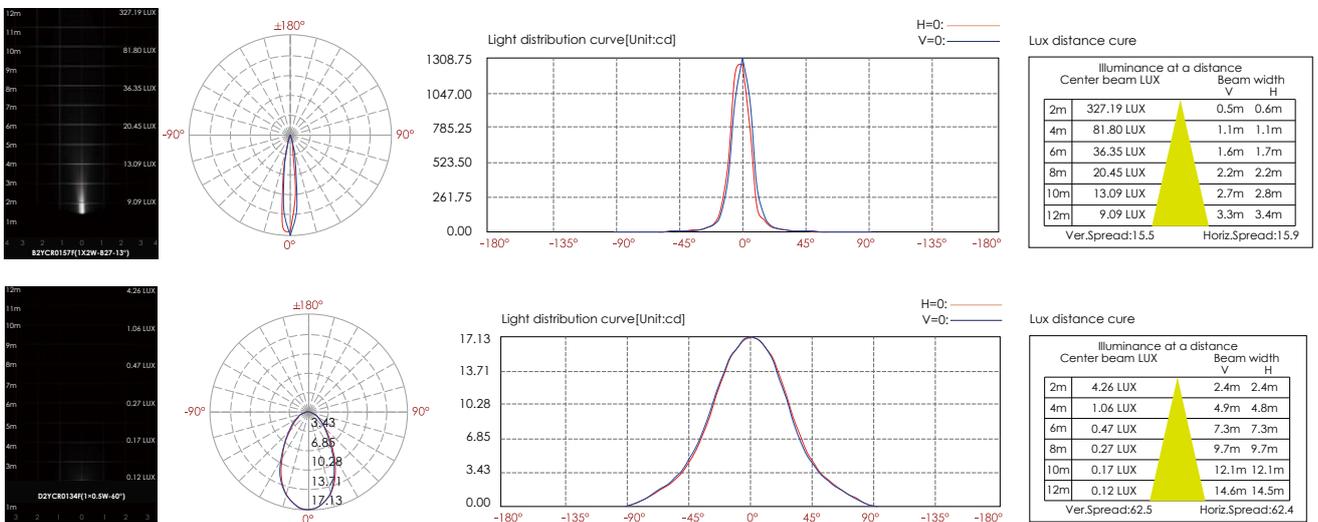

sales@gordonbullarda.com
www.bullardoutdoor.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA

HOW TO ORDER:

CODE:

CODE: BO-B2YCR0157-IN



CODE: BO-D2YCR0134-IN



EXAMPLE:

BO-B2YCR0157-IN-K30-DIM-A-B

BO-B2YCR0157-
IN-K30-DIM-A-B

1. CHOOSE FIXTURE MODEL:

BO-B2YCR0157-IN

BO-D2YCR0134-IN

2. CHOOSE CCT:


-K30	3000K
-K35	3500K
-K40	4000K
-K50	5000K
-CUS*	Custom on request

3. DIMMING OPTIONS:

-PWM	Triac PWM
-DIM	1-10V
-DALI	DALI
-CUS*	Custom on request

4. WATER PROOF SOLUTION (included):

- A **Water-Stopper(Included)**
IP-67 water-stopper is added in the end of luminaires as standard assembly which is also an important system for water resistance.

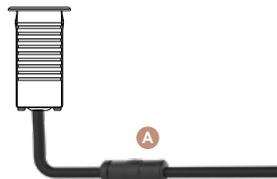

HOW TO ORDER:

CODE:

EXAMPLE:

BO-B2YCR0157-IN-K30-DIM-A-B

BO-B2YCR0157-
IN-K30-DIM-A-B

5. WATER PROOF SOLUTION (optional):

- B IP67 Jiffy quick plug/socket connector (Option)
A IP-67 connector is as an optional assembly and ensures that water vapor will not enter into luminaires directly.



CODE: BO-B2YCR0157-IN



CODE: BO-D2YCR0134-IN

