



CODE: BO-FB2XBR0357-IN

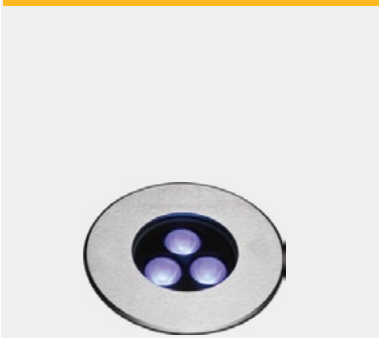

LIGHT SOURCE:

3 × 2W OSRAM

LENS:

FB03

SELECTED DEGREE:

20°

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

43 mA

CONSUMPTION:

5.6W



LUMINANCE:

CW=452 | WW=388

IK:

08

CODE: BO-FB2XCR0657-IN

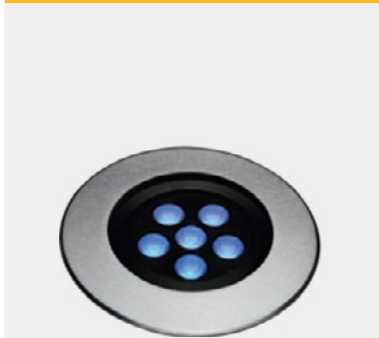

LIGHT SOURCE:

6 × 2W OSRAM

LENS:

FB06

SELECTED DEGREE:

20°

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

55 mA

CONSUMPTION:

12.1W

LUMINANCE:


CW=1251 | WW=977

IK:


08

WATER PROOF SOLUTION

BO-FB2XBR0357-IN

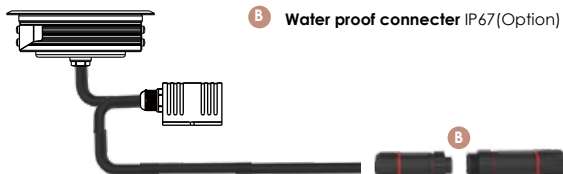

BO-FB2XCR0657-IN

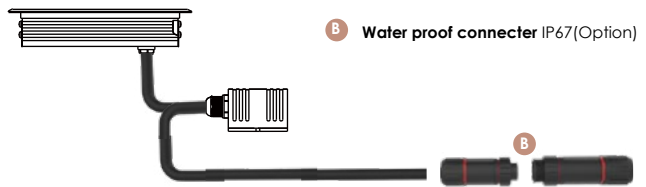

sales@gordonbullarda.com
www.bullardoutdoor.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA

HOUSING	12# Die-casting dark grey powder coated aluminum T=60-80μm.Adhesion of ISO class 1/ASTM class 4B
FRONT RING	Hard chromeplated stainless steel
LIGHT WINDOW	SUS 316L# Tempered frosted step glass.T=8mm
LED	OSRAM
CRI	90
CCT	3000K / 3500K / 4000K / 5000K / Custom on request
GLASS PRESSURE CAPACITY	Full area=3370kgs
OPERATING TEMPERATURE	-20°C~40°C
POWER CABLE	Outside of luminaire 110-277V: H05RN-F 3×1.0mm², L=0.5m
DIMMING SUPPORT	Triac PWM, 1-10V,Dali ,Customized

OPTICS

Referenced Degree(°)θ1/2

		9°	15°	20°	30°	45°
	FB33					
	FB06					60°

INSTALLATION DIAGRAM

BO-FB2XBR0357-IN






- A: Minimum space for external driver is 48mm.
B: External driver of high voltage.

BO-FB2XCR0657-IN



- A: Minimum space for external driver is 48mm.
B: External driver of high voltage.




PHOTOMETRIC

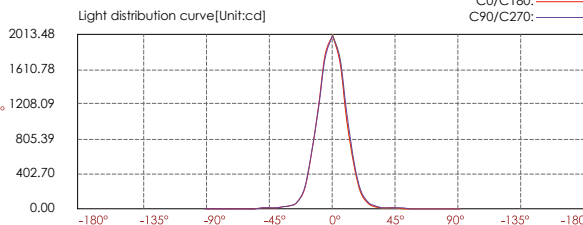

Lux distance cure

	Center beam LUX	Beam width V	Beam width H
2m	500.77 LUX	0.8m	0.8m
4m	125.19 LUX	1.6m	1.5m
6m	55.64 LUX	2.4m	2.3m
8m	31.30 LUX	3.2m	3.1m
10m	20.03 LUX	4.0m	3.8m
12m	13.91 LUX	4.7m	4.6m

Ver.Spread:22.4 Horiz.Spread:21.8

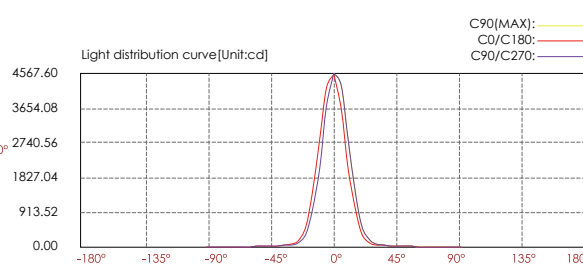

Lux distance cure

	Center beam LUX	Beam width V	Beam width H
2m	1133.51 LUX	0.8m	0.8m
4m	283.38 LUX	1.5m	1.5m
6m	125.95 LUX	2.3m	2.3m
8m	70.84 LUX	3.0m	3.0m
10m	45.34 LUX	3.8m	3.8m
12m	31.49 LUX	4.5m	4.5m

Ver.Spread:21.4 Horiz.Spread:21.3

sales@gordonbullard.com
www.bullardoutdoor.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA

KETO

HOW TO ORDER:

CODE:

CODE: BO-FB2XBR0357-IN



SMALL (S)

CODE: BO-FB2XCR0657-IN



MEDIUM (M)

EXAMPLE:

BO-FB2XBR0357-IN-K30-DIM

BO-FB2XBR0357-IN

1. CHOOSE FIXTURE SIZE:

BO-FB2XBR0357-IN SMALL
BO-FB2XCR0657-IN MEDIUM

2. CHOOSE CCT:

-K30 3000K
-K35 3500K
-K40 4000K
-K50 5000K
-CUS* Custom on request

3. DIMMING OPTIONS:

PWM - Triac PWM
DIM - 1-10V
DALI - DALI
CUS* - Custom on request