




BULLARD
OUTDOOR

CROCCOLLECTION

CODE: BO-D7DK0110-WL



LIGHT SOURCE:

5W GU-10

SELECTED DEGREE:

175°

INPUT VOLTAGE:

110-120V

OPERATION CURRENT:

41 mA

CONSUMPTION:

5 W

LUMINANCE:

216 lm


CRI:

90

IK:

07

CODE: BO-D7FH0110-WL

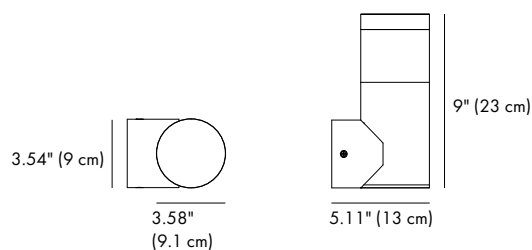

LIGHT SOURCE:

5W GU-10

SELECTED DEGREE:

175°

INPUT VOLTAGE:

110-120V

OPERATION CURRENT:

41 mA

CONSUMPTION:

5 W

LUMINANCE:

242 lm

CRI:

90

IK:

07



sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all sheet sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

© Bullard & Company 2023 All Rights Reserved

Updated 05/20/24

LIGHTING INFORMATION

HOUSING MATERIAL	Extruded aluminum alloy #6063\
PAINTING	Powder coating, T= 60-80 µm. Adhesion of ISO class 1/ASTM class 4B
LIGHT WINDOW	PMMA T=5mm
LIGHT SOURCE	GU-10
CCT	3000K / 3500K / 4000K / 5000K / Custom on request*
OPERATING TEMPERATURE	-20°C- 40°C
POWER CABLE	Outside of luminaire 110-120V: H05RN-F 3×1.0mm ² , L=0.3m

REGULAR PAINTING COLOR

Basic	Secondary
Dark Grey KAP 7037	Silver Grey KAP 9022
	Sanded Black RAL 9005

OPTICS

Referenced Degree(°)θ1/2




LED Lamp


- Maximum power limit is according to GU-10 pin spec
- Input voltage is according to GU10 pin spec

DIAGRAM OF INSTRUCTION



BO-D7DK0110-WL

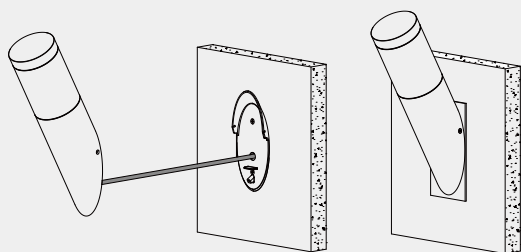

BO-D7FH0110-WL


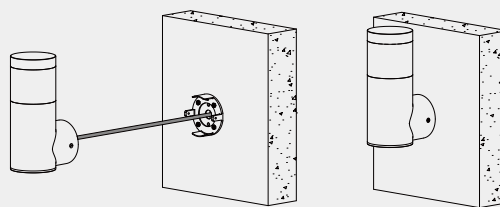


PHOTOMETRIC

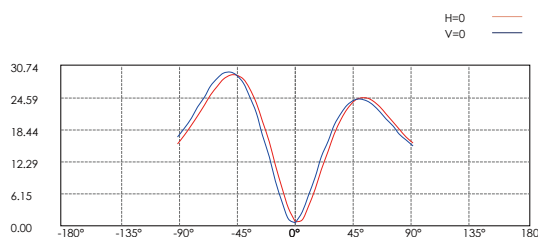

Lux distance Curve

Center Beam LUX	Beam Width V H
0.18 LUX	95.4m 99.5m
0.05 LUX	190.9m 199.0m
0.02 LUX	286.3m 298.4m
0.01 LUX	381.7m 397.9m
0.01 LUX	477.2m 497.4m
0.01 LUX	572.6m 596.9m
Vert.Spread:175.3 Horiz.Spread:175.5	

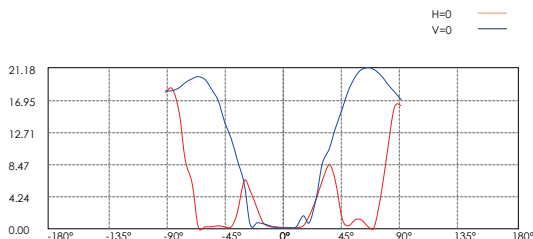

Lux distance Curve

Center Beam LUX	Beam Width V H
0.03 LUX	143.1m 2.0m
0.01 LUX	286.2m 4.0m
0.00 LUX	429.3m 6.0m
0.00 LUX	572.4m 8.0m
0.00 LUX	715.5m 10.0m
0.00 LUX	858.6m 12.0m
Vert.Spread:176.9 Horiz.Spread:53.3	

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

HOW TO ORDER:

CODE:

CODE: BO-D7DK0110-WL



CODE: BO-D7FH0110-WL



EXAMPLE:

BO-D7DK0110-WL-K30-KAP7037

1. CHOOSE FIXTURE SIZE:

BO-D7DK0110-WL

BO-D7FH0110-WL

2. CHOOSE CCT:

K30 - 3000K

K35 - 3500K

K40 - 4000K

K50 - 5000K

CUS* - Custom on request

3. BODY FINISH OPTIONS:



-KAP 7037 Dark Grey



-KAP 9022 Silver Grey



-RAL 9005 Sanded Black